

CLASSIC DISC-O-MULCH FOLDING MODELS



Send back the guarantee certificate
within 15 days with joined invoice
(without these documents we cannot
apply the guarantee procedure).





GUARANTEE RECLAMATION FORM N°

To be returned on reception of the machine

Dealer
Name
Address
Tel
Code Nb

Owner
Nom
Address
Tel

Type of machine	
Working width	
Serial number of the machine	
Delivery date to the user's place (join a copie of invoice and dealer's delivery note)	
Tractor description and horse power	
Type of soil, clay %	
Surface area of farm	

Date : / /

Customer's signature and client's stamp

Dealer's signature and dealer's stamp

We are fully aware of, and accept, the contents of the instruction manual and we hereby adhere to the clauses of the guarantee.

DECLARATION OF CONFORMITY TO « MACHINE » REGULATIONS

	
"Beaucé" F - 44850 LIGNÉ - Tél. 33 (0)2.40.77.40.48 Fax. 33 (0)2.40.77.45.45	
☐ MODEL	
SERIAL N°	
	
MATERIAL MANUFACTURED UNDER LICENCE	

The above-named constructor certifies that the hereby designated new material:

DISC-O-MULCH

Conforms to the dispositions of the modified "machines" regulations (regulation 98/37/CE) and the national legislations transposed.

Signed in Ligné, France

06th September 2005



Michel EVIN
Managing Director



CERTIFICATE OF GUARANTEE	1
SUMMARY	1
INTRODUCTION.....	3
GUARANTEE CONDITIONS	4
CORRECT USE OF THE MACHINE	6
SAFETY INSTRUCTIONS.....	7
GENERAL SAFETY RULES	8
USING YOUR DISC-O-MULCH.....	9
1.1. DESCRIPTION.....	9
1.2. PREPARATION FOR USE.....	9
1.3. COUPLING-UP TO THE TRACTOR	9
1.4. ADJUSTMENTS	9
1.1.1. Working width of an element.....	9
1.1.2. Depth adjustment	9
1.1.3. Maintenance and repair.....	10
1.5. ADVICE FOR OPTIMAL USE	11
DIMENSIONS AND QUOTATIONS	14
DIMENSIONS AND QUOTATIONS 4,00 M MODEL	15
DIMENSIONS AND QUOTATIONS 5,00 M MODEL	16
RANGE OF MACHINES (DECLINAISON ET NOMENCLATURES).....	18
DISC-O-MULCH 3D – 4,00 M MODEL	
• DOM-C35C-400-03.....	19
• DOM-C35C-400-04.....	21
DISC-O-MULCH 3D – 5,00 M MODEL	
• DOM-C35C-500-03.....	23
• DOM-C35C-500-03.....	25
SPARE PARTS	28
ROLLER CAGE KIT Ø520 x 2M.....	29
ROLLER CAGE KIT Ø520 x 2.5M.....	31
LEFT LATERAL DEFLECTOR KIT	33
3D 35 C510 FRONT KIT.....	35
3D 35 M C460 FRONT KIT + GUIDANCE LEGS	37
3D 35 M C510 REAR KIT	39
3D 35 M C510 REAR KIT + GUIDANCE LEGS	41

3D 35 M C460 REAR KIT + GUIDANCE LEGS.....	43
3D 35 M C510 REAR KIT + T2 x 32.....	45
3D 35 M C510 REAR KIT + GUIDANCE LEGS + T2 x 32.....	47
3D 35 M C460 REAR KIT + GUIDANCE LEGS + T1 x 32.....	49
ATTACHMENT PLATE KIT QDC 35.....	51
MOULDED CULTIVATION HUB	53
HYDRAULIC KIT D-O-M C 4M.....	55
HYDRAULIC KIT D-O-M C 5M.....	57
STICKERS KIT	59



INTRODUCTION



You are the owner of a **DISC-O-MULCH**. This machine has been designated to give you complete satisfaction.

This equipment is the result of research into new solutions aimed at reducing costs.

In order to get the most out of your **DISC-O-MULCH**, please read your manual with care and follow, the maintenance and adjustment advice carefully.

Your dealer remains at your disposal for information on any particular point, so please don't hesitate to contact him.

In the interest of improvement, **AGRISEM INTERNATIONAL** reserves the right to modify their products, but in so doing they are not under obligation to reproduce these modifications on existing models.

Likewise, characteristics in this manual can be modified without notice and adjustment procedures and subsequent use, which is indicative, can not be under our responsibility.

GUARANTEE CONDITIONS



These guarantee conditions are only applicable to **machines exclusively equipped with original AGRISEM INTERNATIONAL parts**, « Beaucé », 44850 LIGNE, FRANCE; they are as follows:

- If a fault is noticed on any structural part of the machine in the **6 months** following delivery and if this fault is due to a raw material defect or due to fabrication procedures at the factory. The parts presumed faulty should be returned to the company for appraisal.

Proof of delivery:

- The date on the delivery note and the bill.
- The return of the guarantee card within 8 days of delivery (signed and stamped by the dealer and the owner).

The guarantee is limited to refunding or repair of the faulty parts with material and finishing in our factory and by our technical service.

- Costs relating to dismantling and replacement of the faulty part are not covered by the guarantee nor are the transport costs for the machines or machine-parts to the repair site and back.
 - As concerns the guarantee, the term “Machine” is designated exclusively for new machines and parts manufactured by AGRISEM INTERNATIONAL. It does not include outside components such as tyres, flexible hydraulic tubes etc even though these parts are also provided by the company.
 - Naturally the guarantee does not apply to :
 - Faults due to wear and tear, misuse, lack of maintenance
 - Accident-damage or use not consistent with usual functions.
 - The company can not be held responsible for damage incurred during transport and manipulation by whichever Transport Company. It is the addressee who must act as necessary as regards the transporters in such a situation.
 - **The guarantee will be rendered null and void if any modifications are carried out on the machine without the formal agreement of AGRISEM INTERNATIONAL or if parts other than those produced by the company are used on the machine (eg. Counterfeit parts).**
 - AGRISEM INTERNATIONAL cannot be held responsible for complaints or injuries to the owner or a third person, nor the indirect consequences as a result; likewise no recourse is possible in the case of the breakdown of an instrument due to a defect or incident with the machine.
 - The company's responsibility concerning the guarantee is dependent on the strict respect of the dealer and the user of the following regulations :
- A) THE RETURN OF THE GUARANTEE CARD BY THE DEALER, DULY FILLED-IN AND SIGNED BY THE DEALER AND THE OWNER.**

B) The recourse must imperatively be formulated on the AGRISEM INTERNATIONAL guarantee reclamation form and sent by the dealer to the company's technical service, by recorded delivery, with an acknowledgement of receipt, within a delay of one month following the incident. The reclamation form must be clearly filled in by the dealer and include the following information :

- Name and address of the dealer, client code,
- Name and address of the owner,
- Type of machine,
- Working width,
- Serial number of the machine,
- Delivery date to the owner,
- Date of the problem,
- Precise references of parts replaced, with invoice number and date,
- Make and type of tractor used,
- Detailed description of presumed causes of incident,
- Surface area worked by machine,
- Surface area of farm,
- Type of soil clay %, ☐ yes ☐ no
- stoney ☐ yes ☐ no

C) The parts presumed faulty should be returned to the company for appraisal along with a duplicate of the guarantee reclamation form as proof. The consecutive transport costs necessary to return the above-said parts are the responsibility of the sender.

D) Maintenance and use of the machine must conform to the user's manual explanations.

E) The technical director or managing director of the company will make the final decision as regards the reclamation. This decision, regardless of the object of the guarantee appeal, is irreversible and the buyer must undertake to accept the decision regarding the defect, its replacement or that of certain parts.

The Company salesmen are not competent to make such a decision and if they do so, it could be considered null and void.

NOTA: In case of refusal, the part remains at the disposition of the client for 8 days, after this delay it will be scrapped with no appeal possible.

F) All safety measures mentioned in the user's manual and likewise those of all complementary material must be respected. All protector elements and safety devices, plus all dangerous parts (eg. Shock absorbers) must be regularly inspected and replaced when necessary.

- The machine dealers have no right or power to take any decision whatsoever, on purpose or otherwise, in the name of the company.
- Concerned with the constant improvement of its products, AGRISEM INTERNATIONAL reserves the right to modify them, with no obligation of reproducing the improvements on existing models.

Furthermore, due to the constant evolution of techniques, no guarantee can be given as regards the description of materials in all documentation produced by the company.

CORRECT USE OF THE MACHINE



The AGRISEM INTERNATIONAL DISC-O-MULCH products must only be used for the work they are destined for.

STUBBLE-BREAKING OF ARABLE SOIL IN STANDARD CONDITIONS

In the case of damage due to use of the machine for work outside the constructor's specifications, the constructor can not be held responsible.

The correct use of the machine also implies:

- The respect of regulations of use, maintenance and upkeep as stated by the constructor,
- Exclusive use of replacement parts, accessories and original equipment appointed by the constructor.

The DISC-O-MULCH must only be used, maintained and repaired by people competent to do so, familiar with the characteristics and the way to use the machine. The above said people should be aware of the possible risks to which they are exposed.

The user must strictly comply with all regulations regarding:

- Accident prevention.
- Safety at work (labour laws).
- Driving on the road (Highway Code).

He has the obligation to observe all warnings concerning the machine. All modifications made by the user or any other person without the written agreement of the constructor disengages all responsibility of the constructor should damage result.



Most accidents that happen while working, during maintenance or when displacing a machine are due to non-observance of elementary security regulations. Consequently, it is imperative that all people likely to work with this machine strictly respect the following fundamental rules and likewise the safety instructions stipulated on the stickers placed on the DISC-O-MULCH.

1. Before all operations make sure that the DISC-O-MULCH is on a stable surface.
2. This DISC-O-MULCH was conceived for precise work, it must always be in perfect working order and only repaired with original AGRISEM INTERNATIONAL parts.
3. All necessary precautions must be taken when adapting working parts that are heavy or sharp.
4. Verify that the machine respects personal safety.
5. Verify tightness of screws and bolts before each use.
6. Verify that the DISC-O-MULCH is coupled correctly.
7. Ensure that the tractor has sufficient ballast at the front before all work, in order to avoid any risk of tipping up; if necessary add ballast to the front of the tractor.
8. Distance all people from the manoeuvring area of the DISC-O-MULCH.
9. Never transport anybody on the DISC-O-MULCH or its complementary tools during work or displacement.
10. Be aware of hidden obstacles (stones, roots, tubing, cable, etc) if an incident occurs, STOP IMMEDIATELY, and find the cause.

NB: If the obstacle is an electric cable or gas-line, alert the authorities competent to deal with it.
11. Never leave the tractor unless the DISC-O-MULCH is resting on the ground, brakes on, motor off and the key out of the ignition.
12. Never adjust or repair anything unless the tractor motor is stopped and the machine is resting on the ground.
13. Before driving on the road, the user must ensure that the instrument is coupled correctly and visible, in respect of the Highway Code.
14. Verify the correct type-pressure on your tractor.
15. On rough ground or tight turns reduce your speed.
16. Before any displacement, even short distances, verify the balance of the tractor and complementary material. Never drive over 25 Km/h when loaded.

GENERAL SAFETY RULES



- **Never let children** climb on the tractor or play close to material, even when the machine is stopped ;
- On delivery of a machine (new or second-hand) insist on the provision of the **user's manual** and the **code of work certificate of conformity** and thereon respect the constructor's instructions ;
- Make sure that the DISC-O-MULCH and its complementary material does not hide the tractors rear lights ;
- If necessary equip your material with **reflective signalization** panels or complementary luminous indicators ;
- Clear the highway of any mud left by the tractor or tools ;
- Be aware that soil-working material, however narrow, presents a real danger (cutting-edge blades, ploughshares, discs...) and can be fatal in an accident ;
- Wear safety shoes and gloves when manipulating sharp parts ;
- If the material is not already equipped, anticipate means of signalization: **illumination ramps, catadioptrics, plates or bands of reflective stickers**. Long or large material must imperatively have a signalling system when the tractor's rear lights are hidden ;
- Always employ **bolts and locking systems** ;
- For exposed metal parts, use an anti-rusting product or grease.



1.1. DESCRIPTION

The DISC-O-MULCH framework can be equipped with a variety of main portions. Each portion is supplied with replaceable wear and tear discs. The discs' working depth is controlled by the depth-control device and a roller.

1.2. PREPARATION FOR USE

When you receive your DISC-O-MULCH, verify that its characteristics are suitable. Then, carry out the preliminary operations for starting up, as indicated in this manual.

1.3. COUPLING-UP TO THE TRACTOR

1. Reverse the tractor in order to couple-up with the DISC-O-MULCH which should be resting on a stable surface.
2. Place the lower lifting arms in line with the coupling caps.
3. Couple-up the lower lifting arms by means of the appropriate device.
4. Adjust the length to the third hole then fix in place with the shaft and clip supplied.
5. To unfasten the DISC-O-MULCH, do the preceding operations in reverse order and ensure that the apparatus is on a stable surface.
6. During coupling-up or unfastening, nobody should remain between the tractor wheels and the DISC-O-MULCH.

1.4. ADJUSTMENTS

11.5 Working width of an element

- The DISC-O-MULCH is delivered with a pre-adjusted distance between each disc.

21.5 Depth adjustment

- Put the elements in their working position.
- Adjust the depth by manipulating the shafts of the multistop caps when your tool is equipped with a roller.

1.5. MAINTENANCE AND REPAIR

Before beginning any maintenance operation or oiling, make sure that the safety instructions have been followed. Before adjustments or verification, make sure the DISC-O-MULCH is horizontal and stable. Block the machine if necessary.

Oiling

The roller cages are fixed by means of two self-aligning blocks which provide grease. For the auto-alignment to function correctly the blocks should be greased at the start of each new season and regularly throughout the season.

The grease used is lithium based grease reinforced with molybdenum bisulphide / NLGI2 grade. AGRISEM INTERNATIONAL can not be held responsible when any other type of grease is used.

Disc

⇒ The discs must be replaced as soon as their diameter reaches the following values.

Disc diameter	Maximum diameter of wear and tear.
 Ø510	Ø 420
 Ø560	
 Ø610	

AGRISEM INTERNATIONAL can not be held responsible if the DISC-O-MULCH is used with discs that have a level of wear and tear superior to that specified.

⇒ To replace the discs :

- Lift the DISC-O-MULCH about 15 cm off the ground and block it in that position with the tractor motor stopped and the parking brake on.
- Take off the damaged disc.
- Put on a new one.

	Only use original AGRISEM INTERNATIONAL parts
---	---

Worn spare parts

All the parts are made from specially treated steel, thus it is not advisable to solder them or else the thermal treatment loses its efficiency.

Masse à eau

	At times of important drops in temperature, don't forget to empty your water ballast to avoid freezing
---	--

1.6. ADVICE FOR OPTIMAL USE

Before all usage, make sure that all safety instructions are followed and that the machine has been greased and maintained correctly.

When the soil humidity is great, slipping could degrade the superficial soil structure. It is better to use a tractor with four-wheel drive to reduce sliding.



For road transport remember to retract the lateral apron and dismantle the end disc



Before any folding or unfolding intervention on the machine, remember to remove the two latching shaft from extensions.

Adapt your working speed to the type of soil and chosen working depth.



Work only in a straight line and **never** turn the machine when in the soil.

Respect the following working depths:

- Stubble-breaking from 3 to 4 cm.



The Disc-O-Mulch equipped with absorbing arms can only work in easy soil without any form of obstacle

Before beginning work verify the following list:

- Are the working parts in good condition and fixed correctly?
- Is there enough ballast on the front of the tractor to lift the DISC-O-MULCH?
- During use verify that the DISC-O-MULCH is correctly coupled and perfectly horizontal when working, in the longitudinal and transversal sense.
- If required, consult your tractor's manual to study all safety aspects and adjustments for raising the tractor in order to optimize the use of your material.
- The correct use of the DISC-O-MULCH optimizes and ensures a good establishment of your crop. AGRISEM INTERNATIONAL can not be held responsible for soil degradation or a result which is not up to your expectations. The user must make his own decisions and assume the risks taken should his machine be used incorrectly or inappropriately.





All Disc-O-Mulch must, imperatively, only work arable land free of foreign bodies.
Ex.: (string, rope...)



*CLASSIC DISC-O-MULCH
FOLDING MODEL*

DIMENSIONS AND QUOTATIONS



4M FOLDING DISC-O-MULCH TRANSPORT POSITION

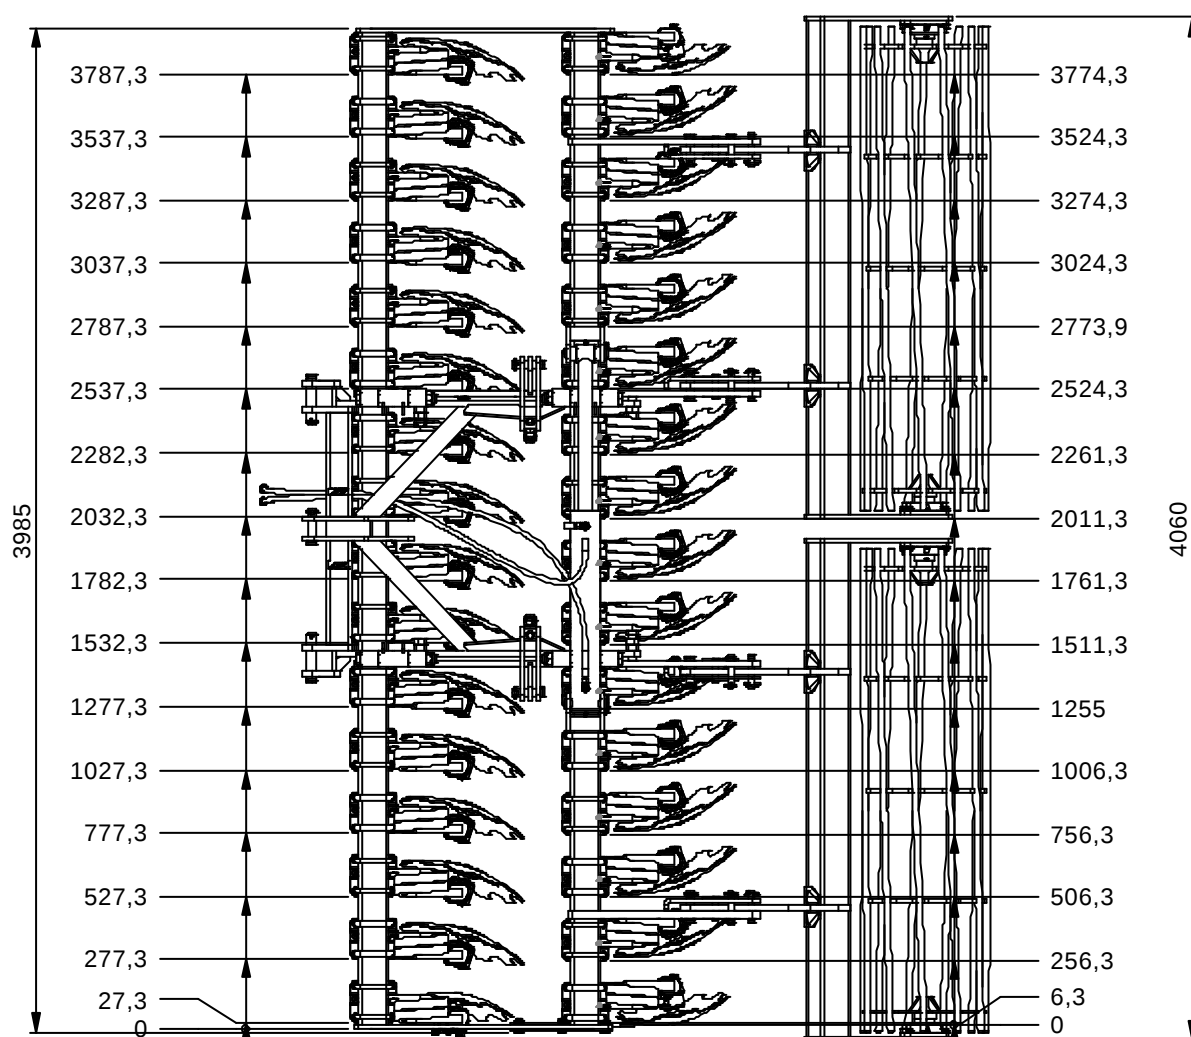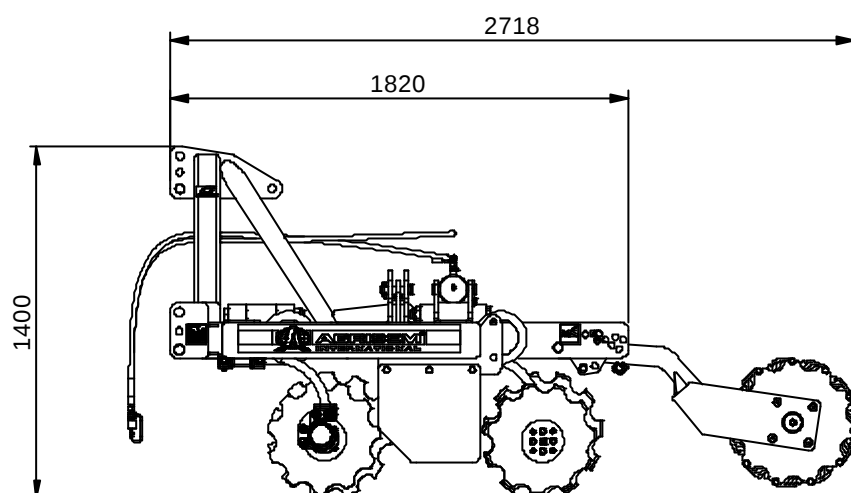

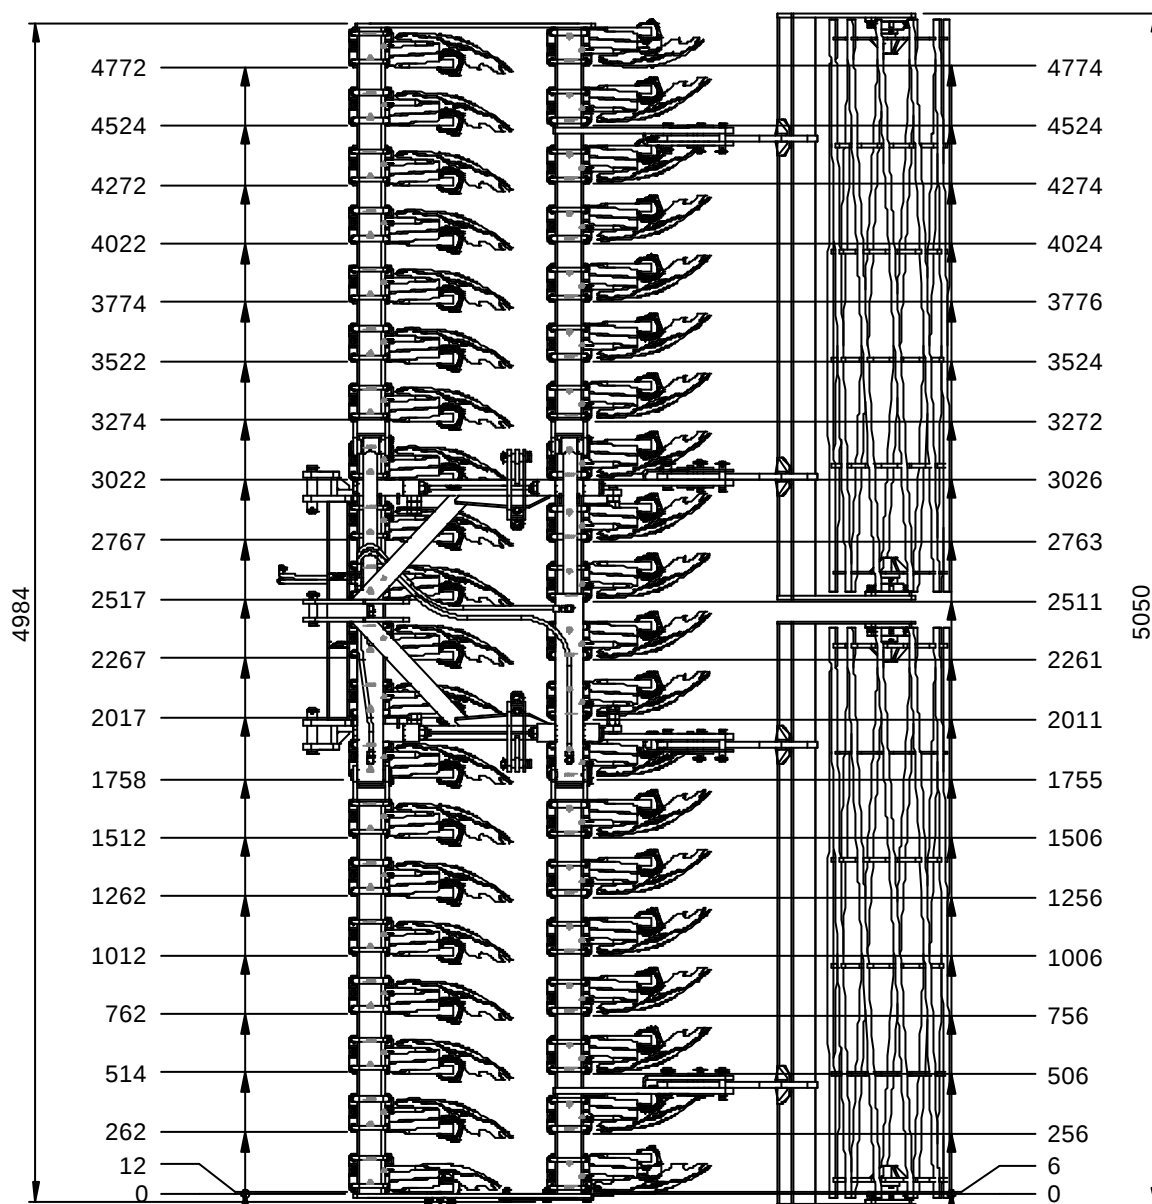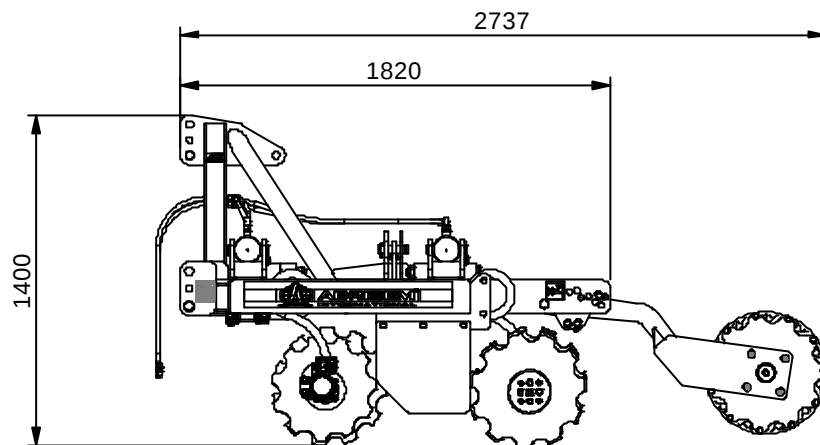


*CLASSIC DISC-O-MULCH
FOLDING MODEL*

RANGE OF MACHINES




4M DISC-O-MULCH ROAD POSITION

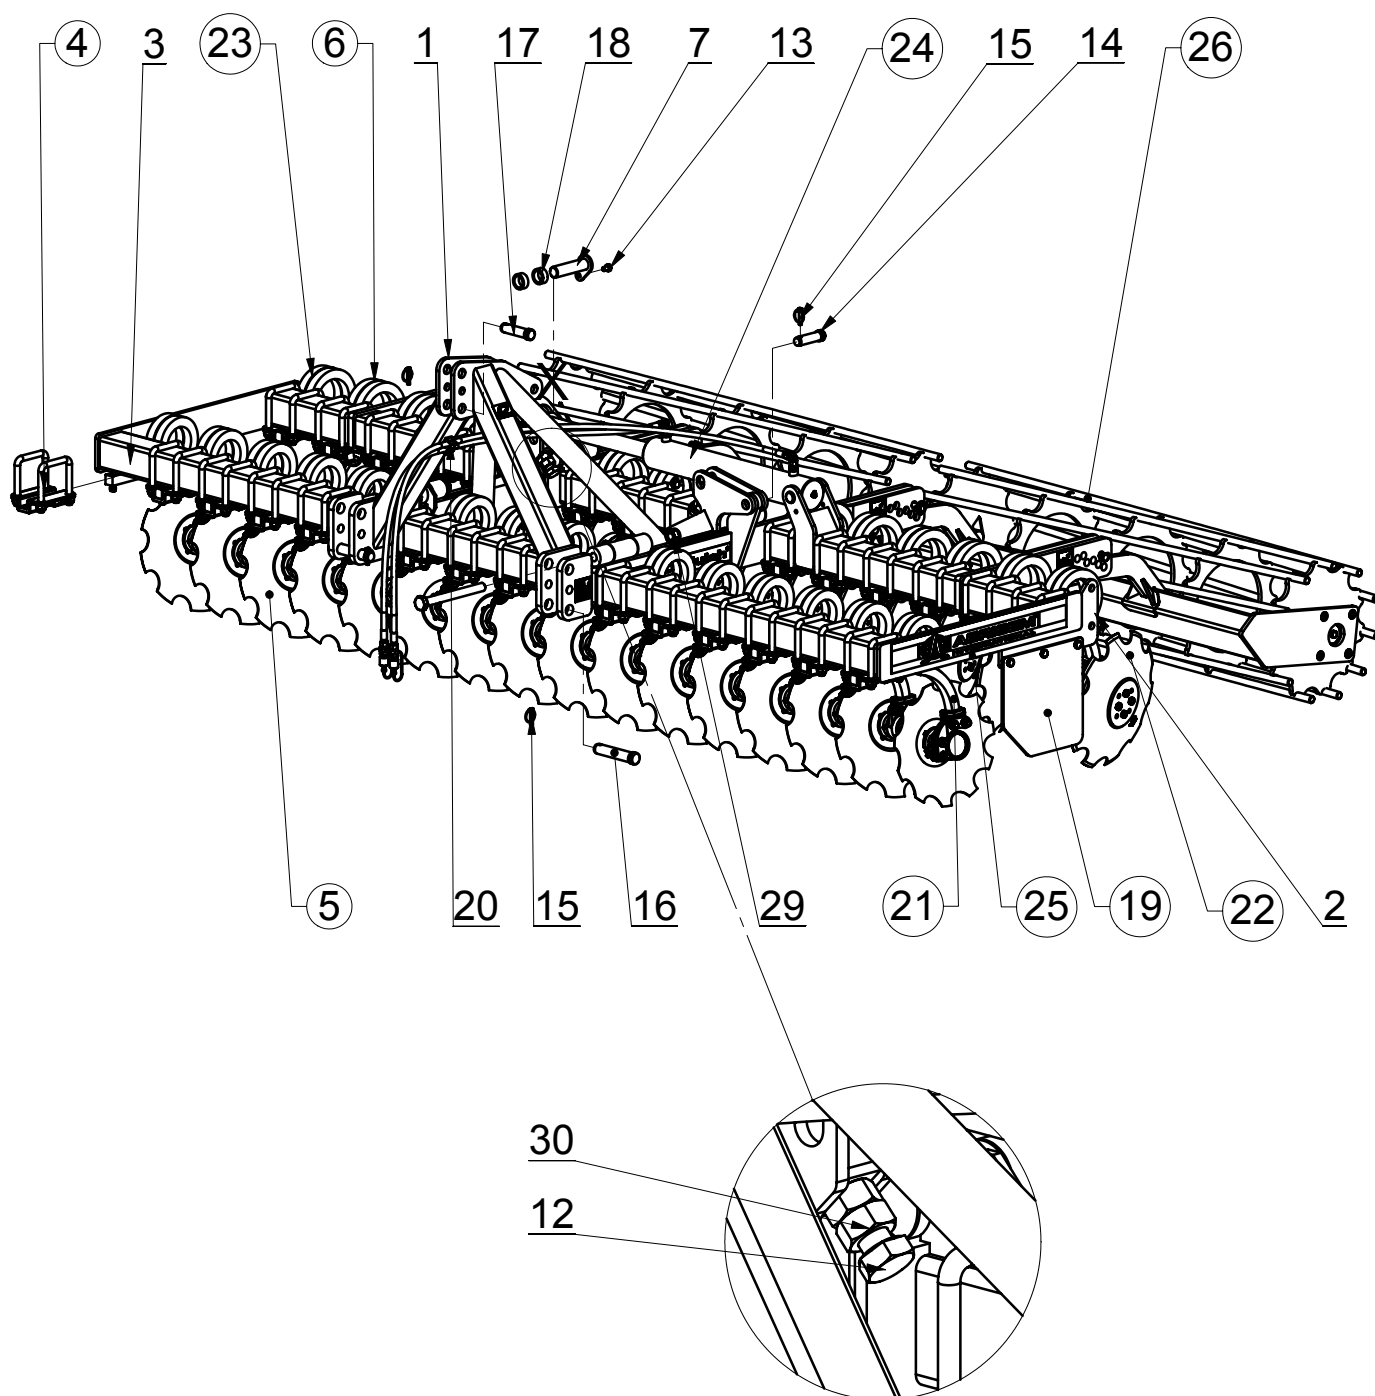


DOM C 4m R sans tabliers

Référence : DOM-C35C-400R-03

					Poids : 2345.92 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-01-501	Central framework	1	256.11	
2	DOM16-01-505	Left-hand extention 4 m	1	194.39	
3	DOM16-01-506	Right-hand extention 4 m	1	189.04	
4	DOM8-03-053	Fixing plate kit QDC 35 - Standard version	32	5.86	
5	CD35M-C511-00	3D 35 average C510 front kit	15	28.91	
6	CD35M-C512-00	3D 35 average C510 rear kit	14	28.91	
7	DOM16-15-506	Ram shaft	2	1.90	
8	VH30-300	Screw H - M30 x 300 - 8.8 - bichromated yellow	4	1.929	
9	EN30	Nylstop Nut M30 - 8 - bichromated yellow	4	0.27	
10	EH30	Nut H-M30 - 8 - bichromated yellow	6		
11	VH30-100-FT	Screw H - M30 x 100 - 8.8 - bichromated yellow	4	1.374	
12	VH30-080-FT	Screw H - M30 x 80 - 8.8 - bichromated yellow	2	0.707	
13	VH14-020-FT	Screw H - M14 x 20 - 8.8 - bichromated yellow	2	0.053	
14	32-090	Shaft Ø32 x 90 Cat.3	2	0.79	
15	GC-10	Bolt clip Ø10	5	0.05	
16	36-160	Shaft Ø36 x 160	2	1.56	
17	32-105	Shaft Ø32x 105	1	0.89	
18	DOM16-15-608	Cross piece	2	0.18	
19	DOM16-08-003	Lefthand lateral deflector kit	1	11.94	
20	CD17	Double-threaded clamp for hose 3/8	1	0.10	
21	CD35M-C461-10	3D 35 average C460 front kit + guidance legs	1	30.07	
22	CD35M-C512-10	3D 35 average C510 rear kit + guidance legs	1	31.29	
23	CD35M-C462-10	3D 35 average C460 rear kit + guidance legs	1	30.06	
24	DOM16-20-001	Hydraulic kit	1	43.79	
25	DOM16-ET-002	Sticker kit	1	0.29	
26	DOM16-06-004	Roller cage kit 4,00m	1	508.07	

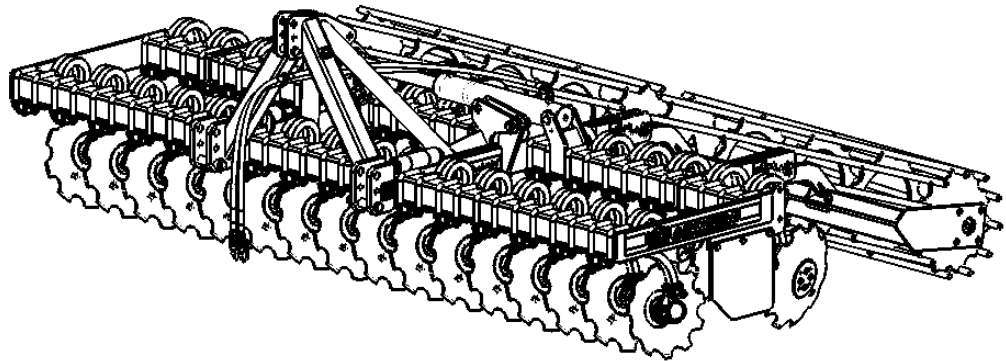


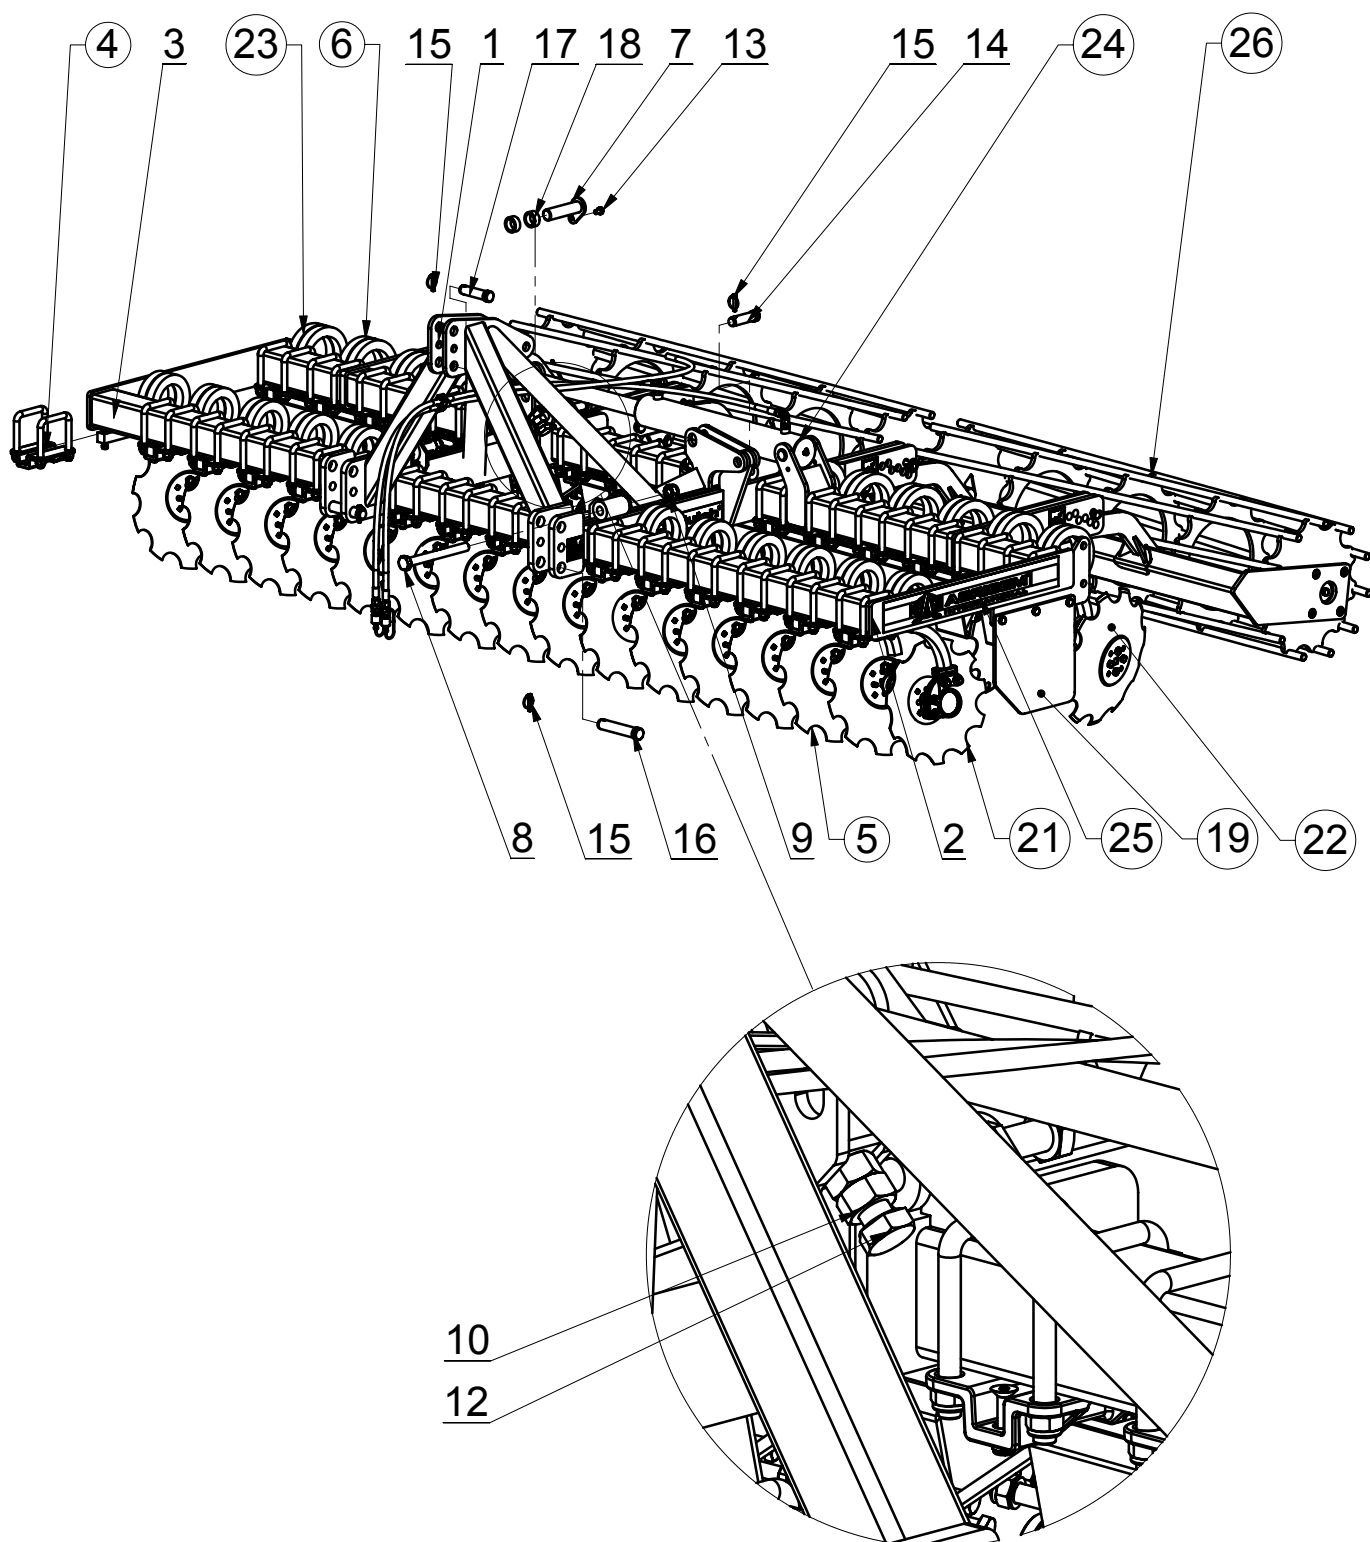


DOM C 4m R avec tabliers

Référence : DOM-C35C-400R-04

					Poids : 2415.14 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-01-501	Central framework	1	256,11	
2	DOM16-01-505	Left-hand extention 4 m	1	194,39	
3	DOM16-01-506	Right-hand extention 4 m	1	189,04	
4	DOM8-03-053	Fixing plate kit QDC 35 - Standard version	32	5,86	
5	CD35M-C511-00	3D 35 average C510 front kit	15	28,91	
6	CD35M-C512-02	3D 35 average C510 back kit + T2x32	14	33,26	
7	DOM16-15-506	Ram shaft	2	1,9	
8	VH30-300	Screw H - M30 x 300 - 8.8 - bichromated yellow	4	1,929	
9	EN30	Nylstop Nut M30 - 8 - bichromated yellow	4	0,27	
10	EH30	Nut H-M30 - 8 - bichromated yellow	6		
11	VH30-100-FT	Screw H - M30 x 100 - 8.8 - bichromated yellow	4	1,374	
12	VH30-080-FT	Screw H - M30 x 80 - 8.8 - bichromated yellow	2	0,707	
13	VH14-020-FT	Screw H - M14 x 20 - 8.8 - bichromated yellow	2	0,053	
14	32-090	Shaft Ø32 x 90 Cat.3	2	0,79	
15	GC-10	Bolt clip Ø10	5	0,05	
16	36-160	Shaft Ø36 x 160	2	1,56	
17	32-105	Shaft Ø32x 105	1	0,89	
18	DOM16-15-608	Cross piece	2	0,18	
19	DOM16-08-003	Lefthand lateral deflector kit	1	11,94	
20	CD17	Double-threaded clamp for hose 3/8	1	0,1	
21	CD35M-C461-10	3D 35 average C460 front kit + guidance legs	1	30,08	
22	CD35M-C512-12	3D 35 average C510 rear kit + guidance legs kit + T2x32	1	35,62	
23	CD35M-C462-11	3D 35 average C460 rear kit + guidance legs kit + T1x32	1	33,98	
24	DOM16-20-001	Hydraulic kit	1	43,79	
25	DOM16-ET-002	Sticker kit	1	0,29	
26	DOM16-06-004	Roller cage kit 4,00m	1	508,07	

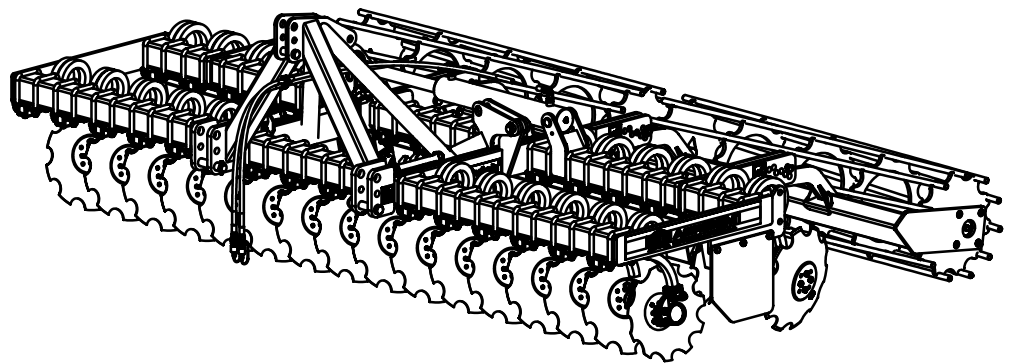


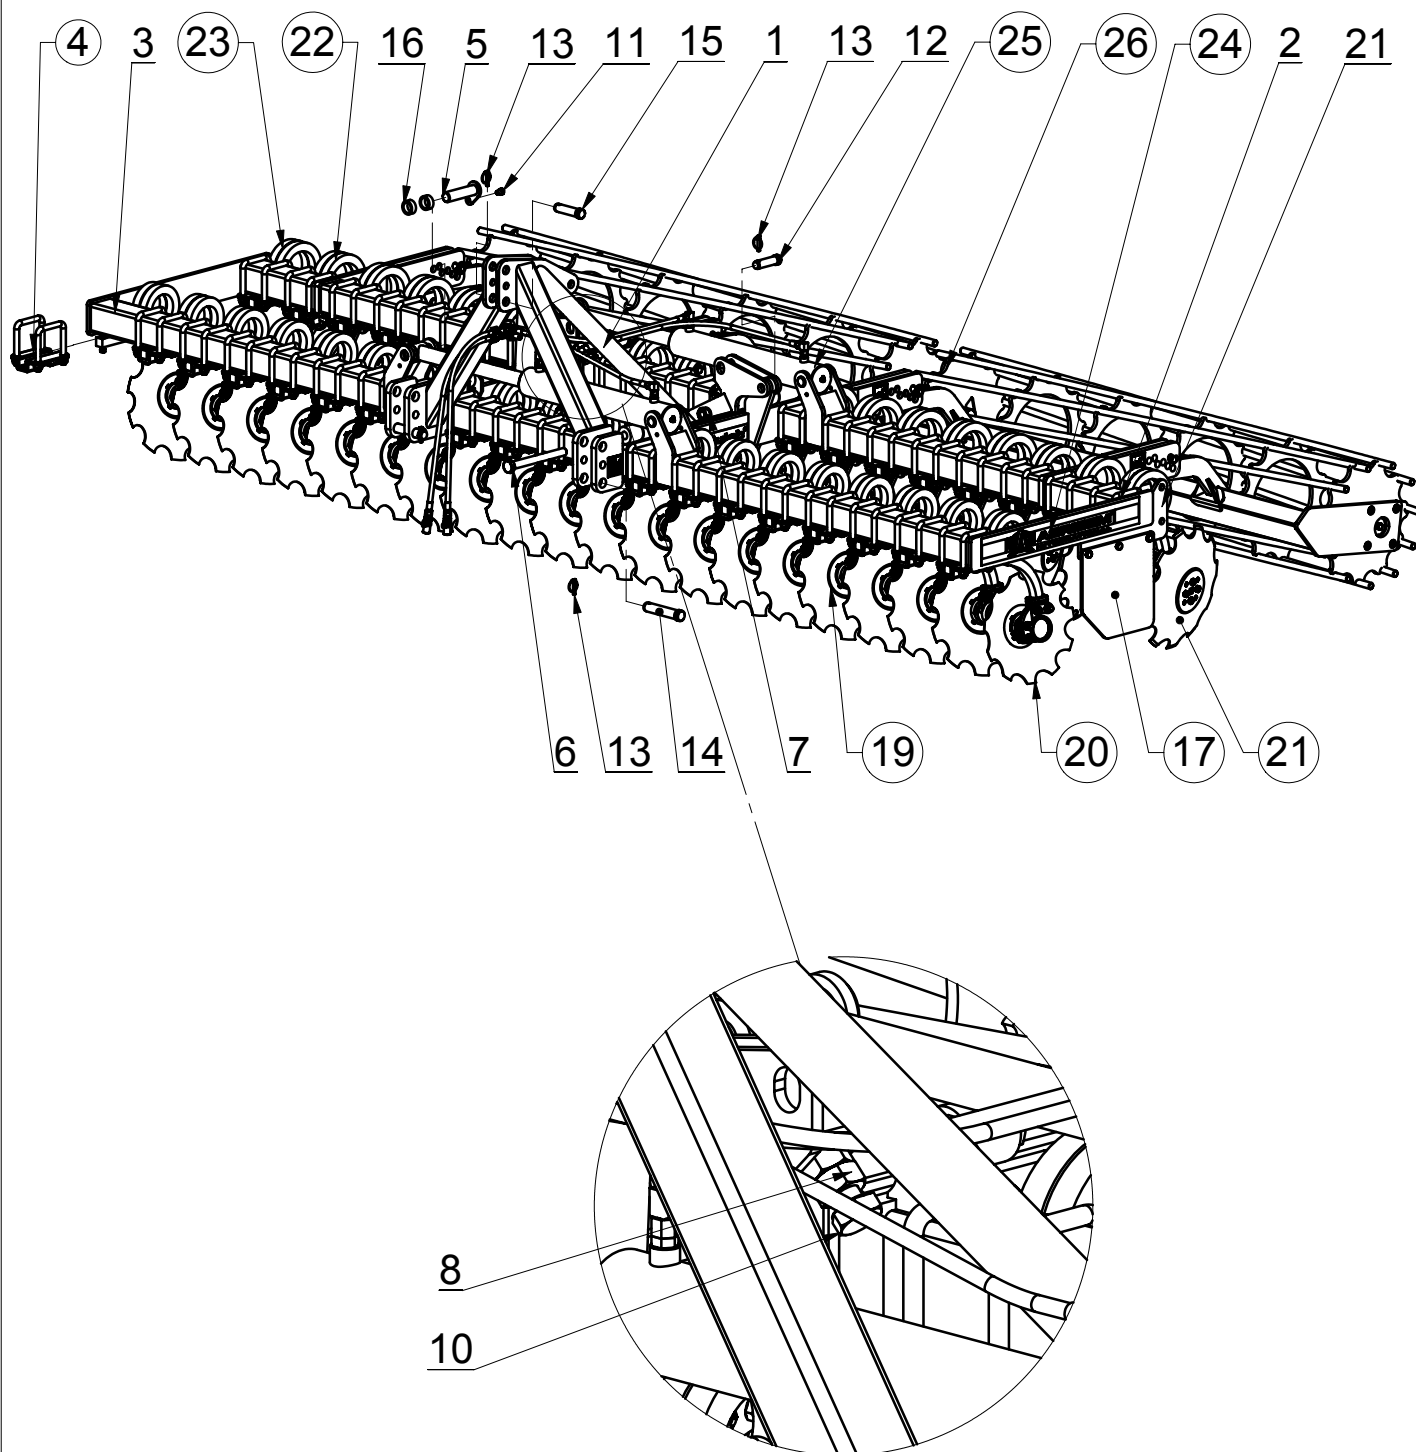


DOM C 5m R sans tabliers

Référence : DOM-C35C-500R-03

					Poids : 2803.02 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-01-501	Central framework	1	256.11	
2	DOM16-01-507	Left-hand extention 5 m	1	228.42	
3	DOM16-01-508	Right-hand extention 5 m	1	223.06	
4	DOM8-03-053	Fixing plate kit QDC 35 - Standard version	40	5.86	
5	DOM16-15-506	Ram shaft	4	1.90	
6	VH30-300	Screw H - M30 x 300 - 8.8 - bichromated yellow	4	1.929	
7	EN30	Nylstop Nut M30 - 8 - bichromated yellow	4	0.27	
8	EH30	Nut H-M30 - 8 - bichromated yellow	6		
9	VH30-100-FT	Screw H - M30 x 100 - 8.8 - bichromated yellow	4	1.374	
10	VH30-080-FT	Screw H - M30 x 80 - 8.8 - bichromated yellow	2	0.707	
11	VH14-020-FT	Screw H - M14 x 20 - 8.8 - bichromated yellow	4	0.053	
12	32-090	Shaft Ø32 x 90 Cat.3	2	0.79	
13	GC-10	Bolt clip Ø10	5	0.05	
14	36-160	Shaft Ø36 x 160	2	1.56	
15	32-105	Shaft Ø32x 105	1	0.89	
16	DOM16-15-608	Cross piece	4	0.18	
17	DOM16-08-003	Lefthand lateral deflector kit	1	11.94	
18	CD17	Double-threaded clamp for hose 3/8	1	0.10	
19	CD35M-C511-00	3D 35 average C510 front kit	19	28.91	
20	CD35M-C461-10	3D 35 average C460 front kit + guidance legs	1	30.08	
21	CD35M-C512-10	3D 35 average C510 rear kit + guidance legs	1	31.29	
22	CD35M-C512-00	3D 35 average C510 rear kit	18	28.91	
23	CD35M-C462-10	3D 35 average C460 rear kit + guidance legs	1	30.08	
24	DOM16-ET-002	Sticker kit	1	0.29	
25	DOM16-20-002	Hydraulic kit	1	93.55	
26	DOM16-06-005	Roller cage kit 5,00m	1	564.57	

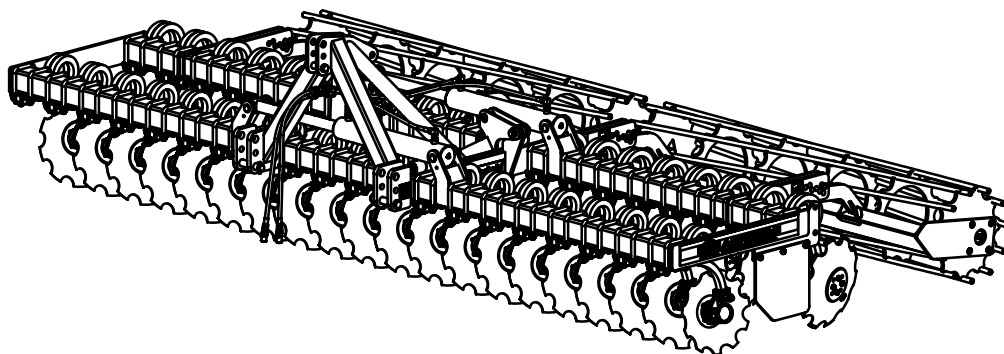


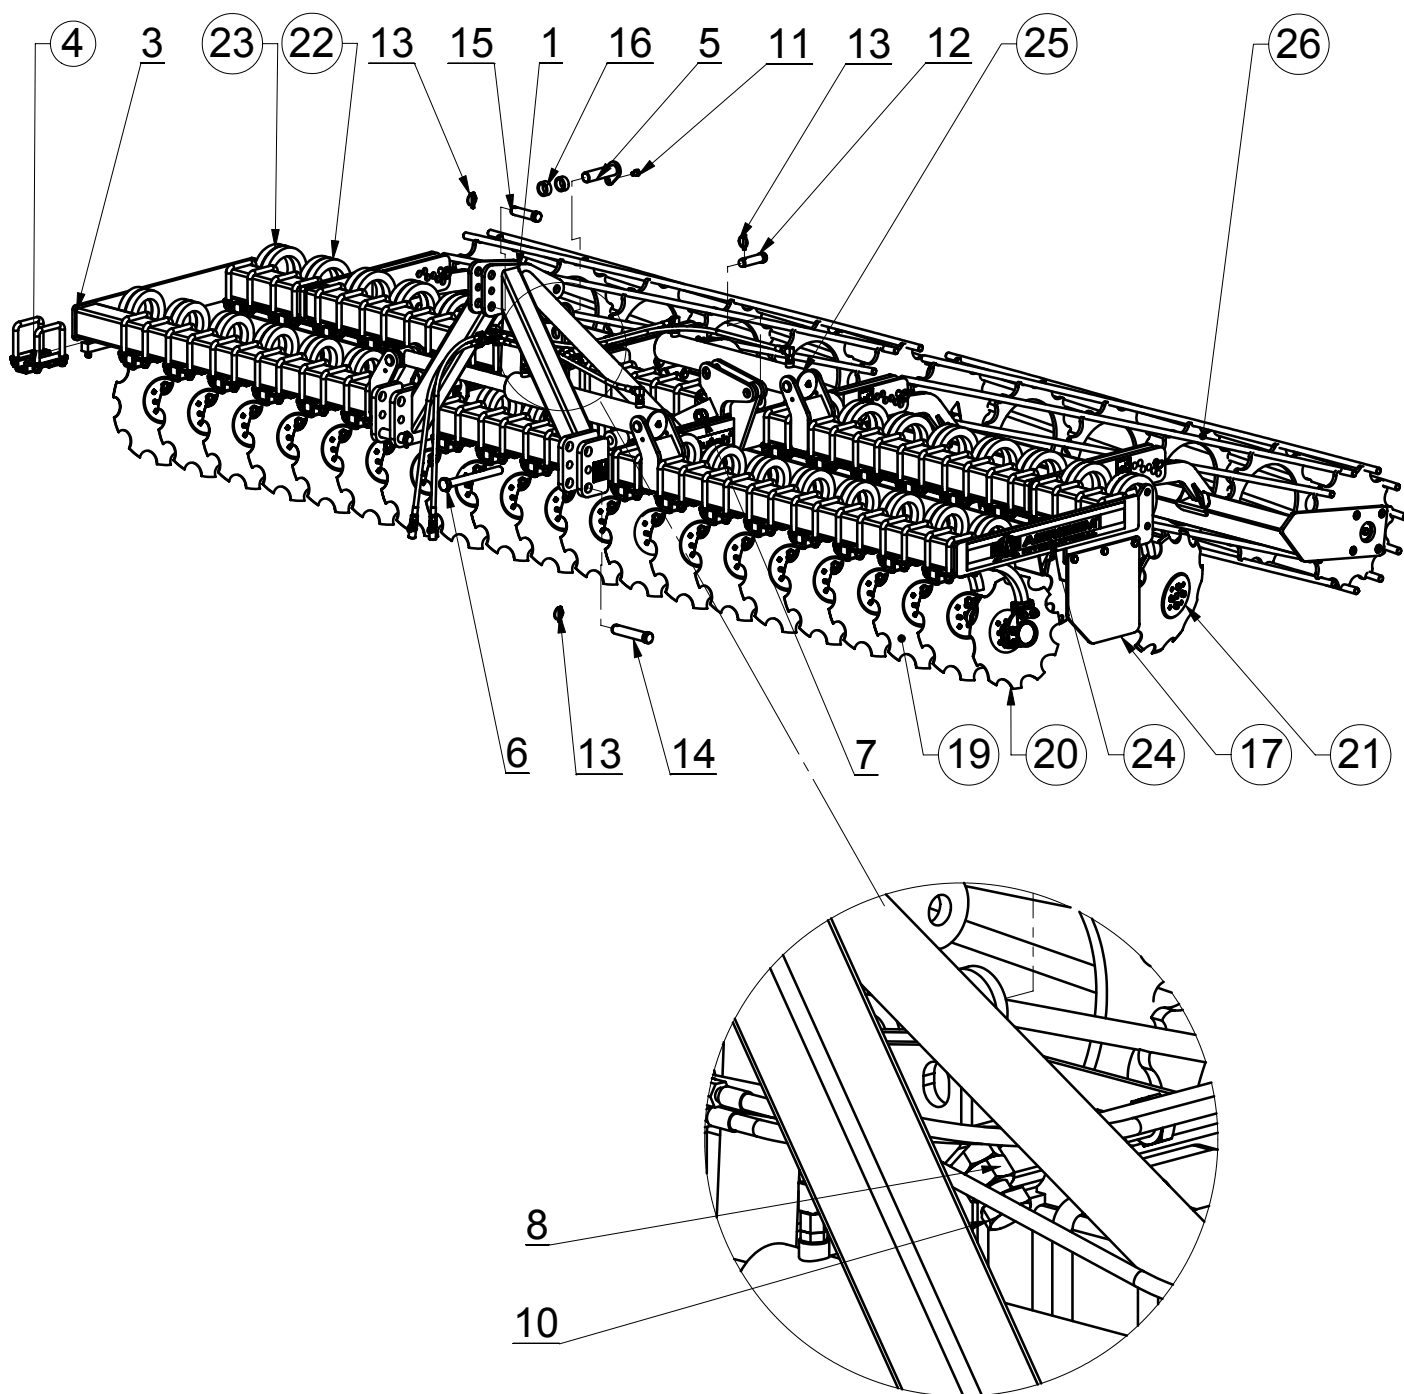

DOM C 5m R avec tabliers

Référence : DOM-C35C-500R-04

					Poids : 2889.62 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-01-501	Central framework	1	256,11	
2	DOM16-01-507	Left-hand extention 5 m	1	228,42	
3	DOM16-01-508	Right-hand extention 5 m	1	223,06	
4	DOM8-03-053	Fixing plate kit QDC 35 - Standard version	40	5,86	
5	DOM16-15-506	Ram shaft	4	1,9	
6	VH30-300	Screw H - M30 x 300 - 8.8 - bichromated yellow	4	1,929	
7	EN30	Nylstop Nut M30 - 8 - bichromated yellow	4	0,27	
8	EH30	Nut H-M30 - 8 - bichromated yellow	6		
9	VH30-100-FT	Screw H - M30 x 100 - 8.8 - bichromated yellow	4	1,374	
10	VH30-080-FT	Screw H - M30 x 80 - 8.8 - bichromated yellow	2	0,707	
11	VH14-020-FT	Screw H - M14 x 20 - 8.8 - bichromated yellow	4	0,053	
12	32-090	Shaft Ø32 x 90 Cat.3	2	0,79	
13	GC-10	Bolt clip Ø10	5	0,05	
14	36-160	Shaft Ø36 x 160	2	1,56	
15	32-105	Shaft Ø32x 105	1	0,89	
16	DOM16-15-608	Cross piece	4	0,18	
17	DOM16-08-003	Lefthand lateral deflector kit	1	11,94	
18	CD17	Double-threaded clamp for hose 3/8	1	0,1	
19	CD35M-C511-00	3D 35 average C510 front kit	19	28,91	
20	CD35M-C461-10	3D 35 average C460 front kit + guidance legs	1	30,08	
21	CD35M-C512-12	3D 35 average C510 rear kit + guidance legs kit + T2x32	1	35,62	
22	CD35M-C512-02	3D 35 average C510 back kit + T2x32	18	33,26	
23	CD35M-C462-11	3D 35 average C460 rear kit + guidance legs kit + T1x32	1	33,98	
24	DOM16-ET-002	Sticker kit	1	0,29	
25	DOM16-20-002	Hydraulic kit	1	93,55	
26	DOM16-06-005	Roller cage kit 5,00m	1	564,57	

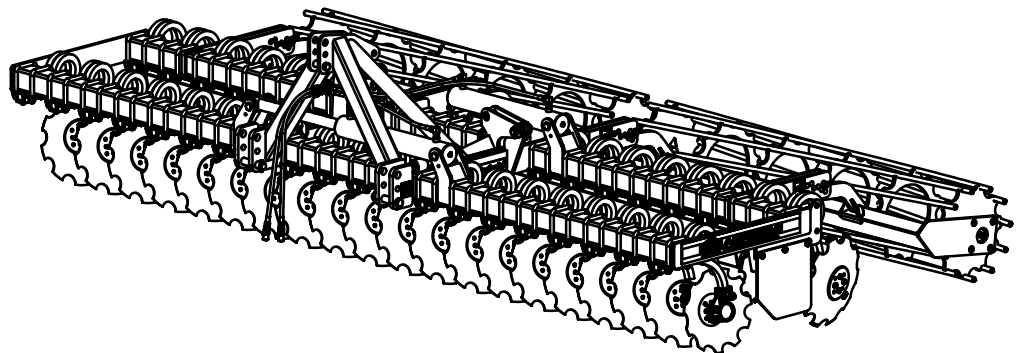


*CLASSIC DISC-O-MULCH
FOLDING MODEL*


SPARE PARTS



MODÈLE 5.00 M EQUIPPED WITH THE ROLLER CAGE Ø520

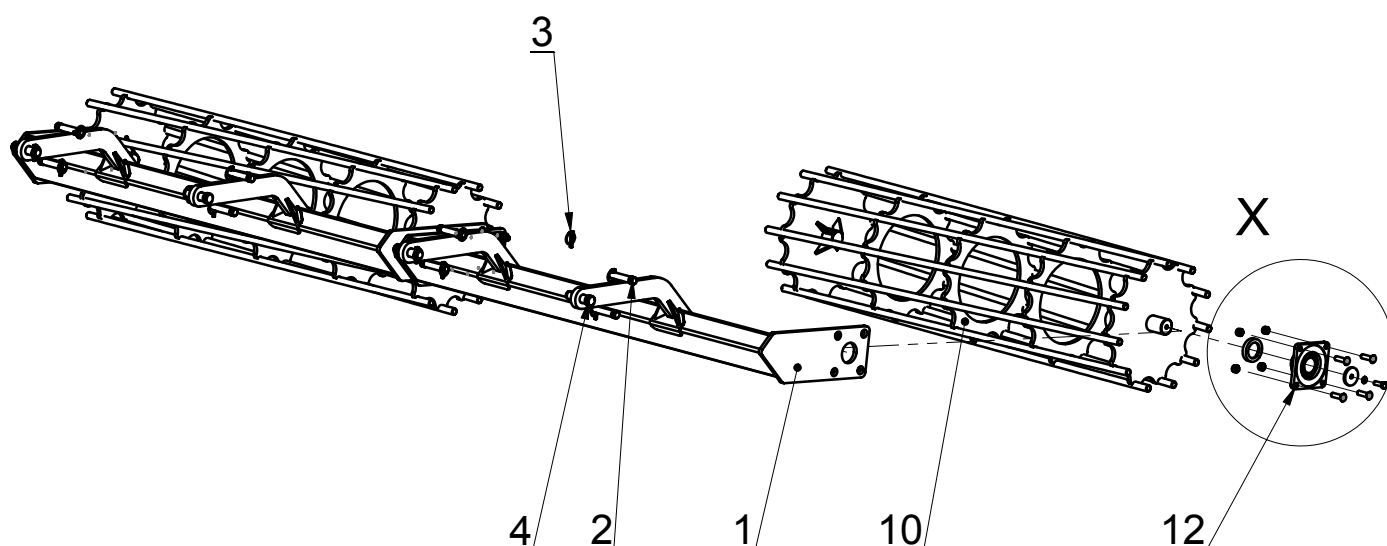


DÉTAIL X
ECHELLE 1 : 15

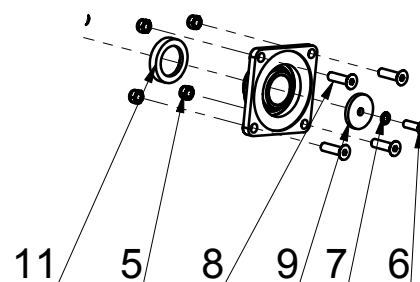


Kit rouleaux 4m


Référence : DOM16-06-004

					Poids : 508.07 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM15-06-508	Roller framework 2,00 m	2	83.09	
2	25-095	Shaft Ø25 x 095 Cat.2	8	0.49	
3	GC-10	Bolt clip Ø10	12	0.05	
4	32-090	Shaft Ø32 x 90 Cat.3	4	0.79	
5	EN16	Nylstop Nut M16 - 8 - bichromated yellow	16	0.04	
6	VH14-045	Screw H - M14 x 45 - 8.8 - bichromated yellow	2	0.083	
7	RJZ14	Washer with inner-teeth Ø14	2	0.002	
8	VFHC16-060-FT	Screw FHC - M16 x 60 - 8.8 - bichromated yellow	16	0.11	
9	DOM8-06-612	Bearing fixing washer Ø60	2	0.23	
10	RC520-200	Roller cage Ø520 x 2.00m	2	154.91	
11	DOM8-06-611	Cross piece bearing Ø60	2	0.34	
12	PAL-504	Cast iron bearing Ø60 - 4 holes	4	5.20	

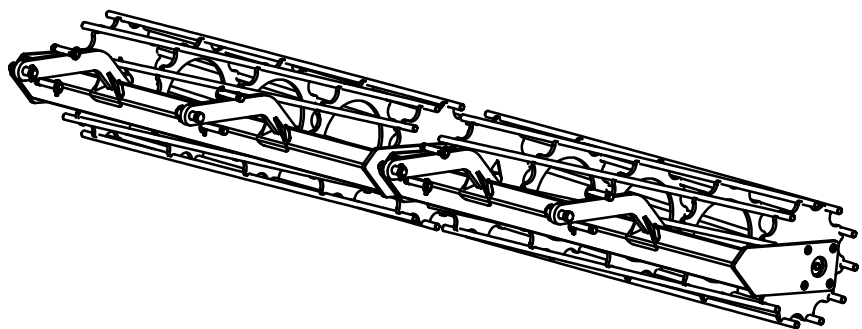

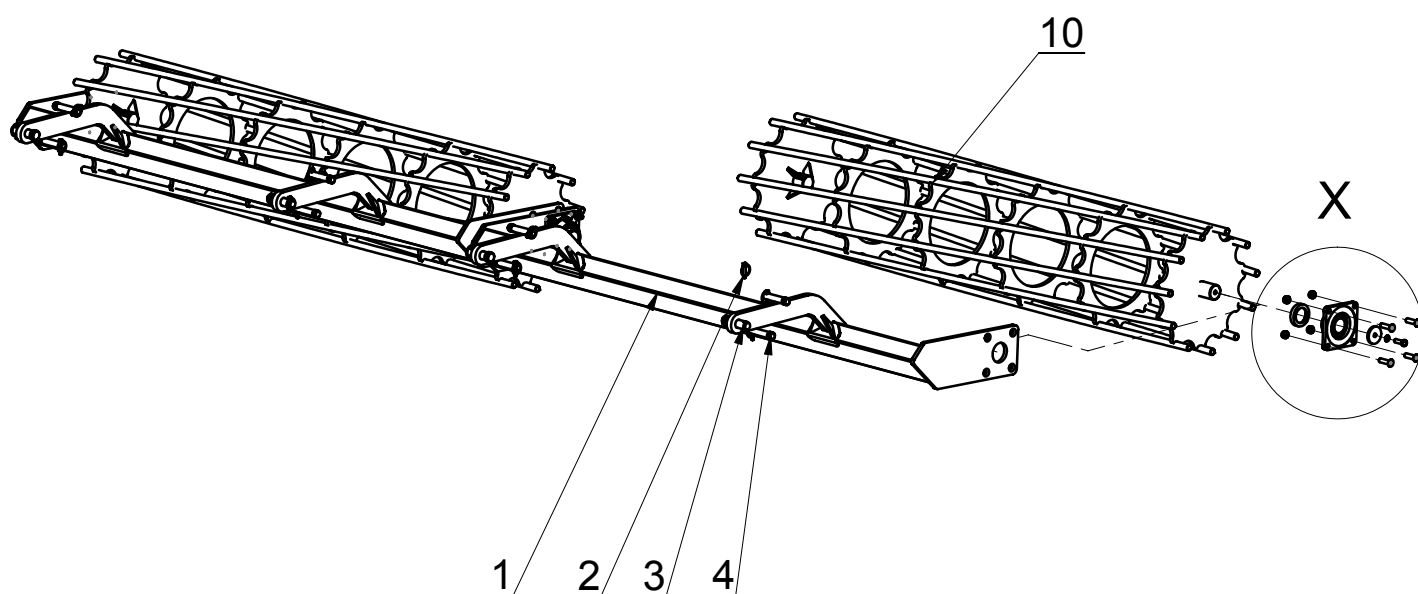


DÉTAIL X
ECHELLE 1 : 10

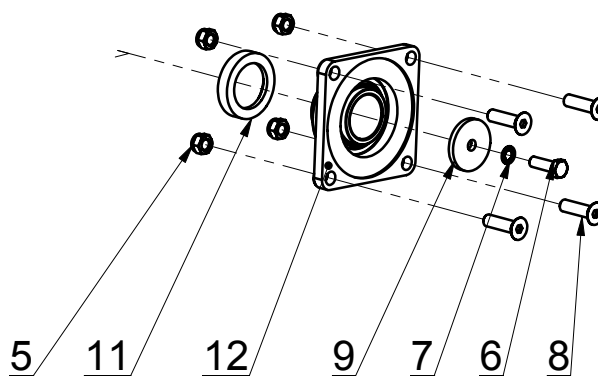


Kit rouleaux 5m

Référence : DOM16-06-005

					Poids : 564.57 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-06-508	Roller framework 2,50 m	2	80.92	
2	GC-10	Bolt clip Ø10	12	0.05	
3	32-090	Shaft Ø32 x 90 Cat.3	4	0.79	
4	25-095	Shaft Ø25 x 095 Cat.2	8	0.49	
5	EN16	Nylstop Nut M16 - 8 - bichromated yellow	16	0.04	
6	VH14-045	Screw H - M14 x 45 - 8.8 - bichromated yellow	2	0.083	
7	RJZ14	Washer with inner-teeth Ø14	2	0.002	
8	VFHC16-060-FT	Screw FHC - M16 x 60 - 8.8 - bichromated yellow	16	0.11	
9	DOM8-06-612	Bearing fixing washer Ø60	2	0.23	
10	RC520-250	Roller cage Ø520 x 2.5m	2	185.34	
11	DOM8-06-611	Cross piece bearing Ø60	2	0.34	
12	PAL-504	Cast iron bearing Ø60 - 4 holes	4	5.20	

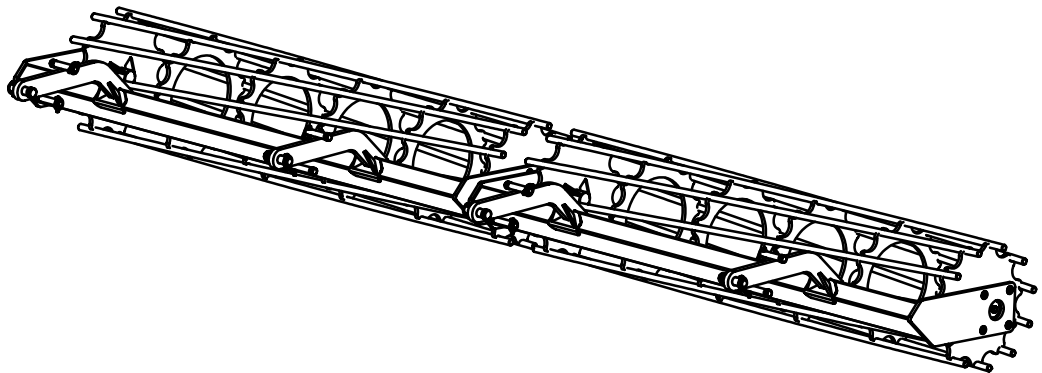


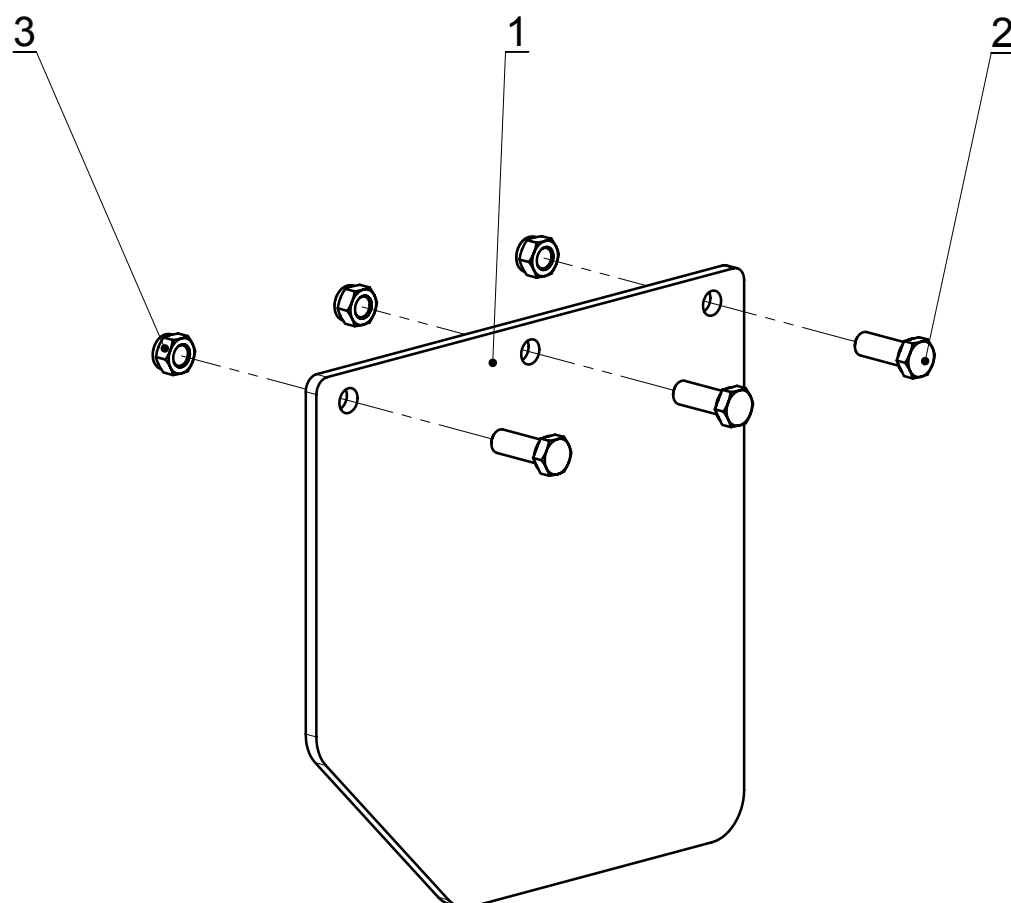


Kit déflecteur latéral gauche

Référence : DOM15-08-003

					Poids : 11.94 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-08-611	Lefthand lateral deflector	1	11.50	
2	VH16-045-FT	Screw H - M16 x 45 - 8.8 - bichromated yellow	3	0.110	
3	EN16	Nylstop Nut M16 - 8 - bichromated yellow	3	0.04	

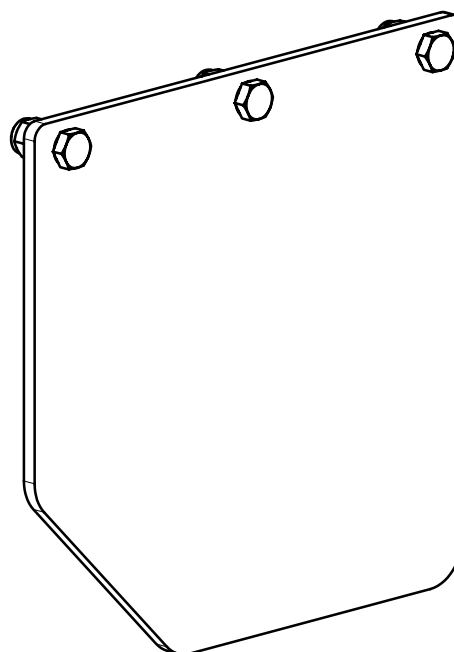


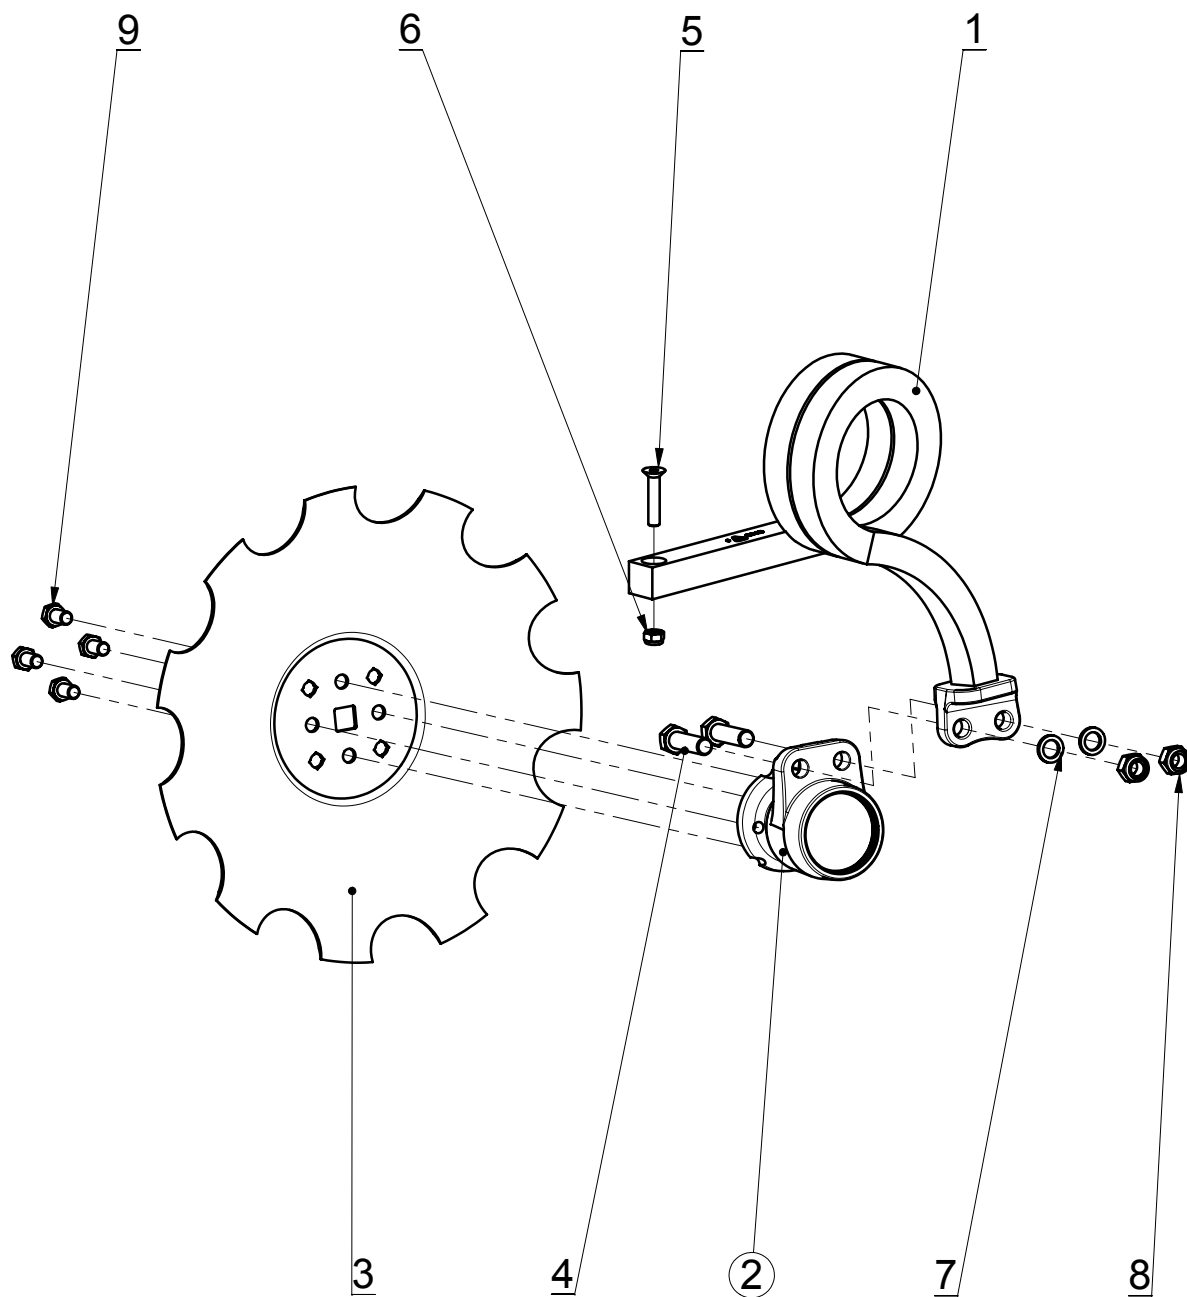


Kit 3D 35 Moyenne C510 Avant

Référence : CD35M-C511-00

					Poids : 28.91 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-03-511	3D S35 Classic rear security	1	16.72	
2	ESS556	Moulded cultivation hub	1	5.70	
3	TCS-DIS-536	Crenellated disc Ø508 with flat base	1	5.67	
4	VH18-065	Screw H - M18 x 65 - 8.8 - bichromated yellow	2	0.186	
5	VH14-025-FT	Screw H - M14 x 25 - 8.8 - bichromated yellow	4	0.059	
6	VFHC12-060	Screw FHC - M12 x 60 - 10.9 - bichromated yellow	1	0.06	
7	EN12	Nylstop Nut M12 - 8 - bichromated yellow	1	0.02	
8	EN18	Nylstop Nut M18 - 8 - bichromated yellow	2	0.06	
9	RNL18	Nord-Lock washer Ø18- bichromated yellow	2	0.01	

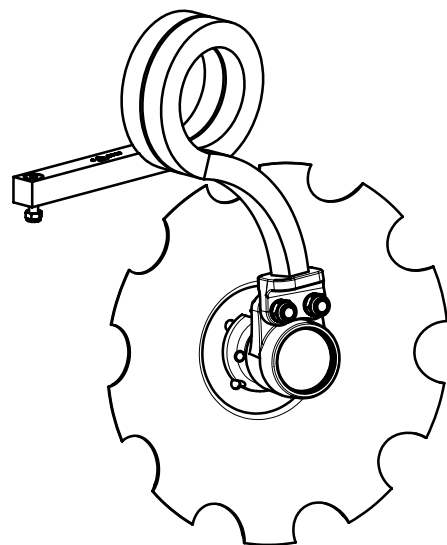


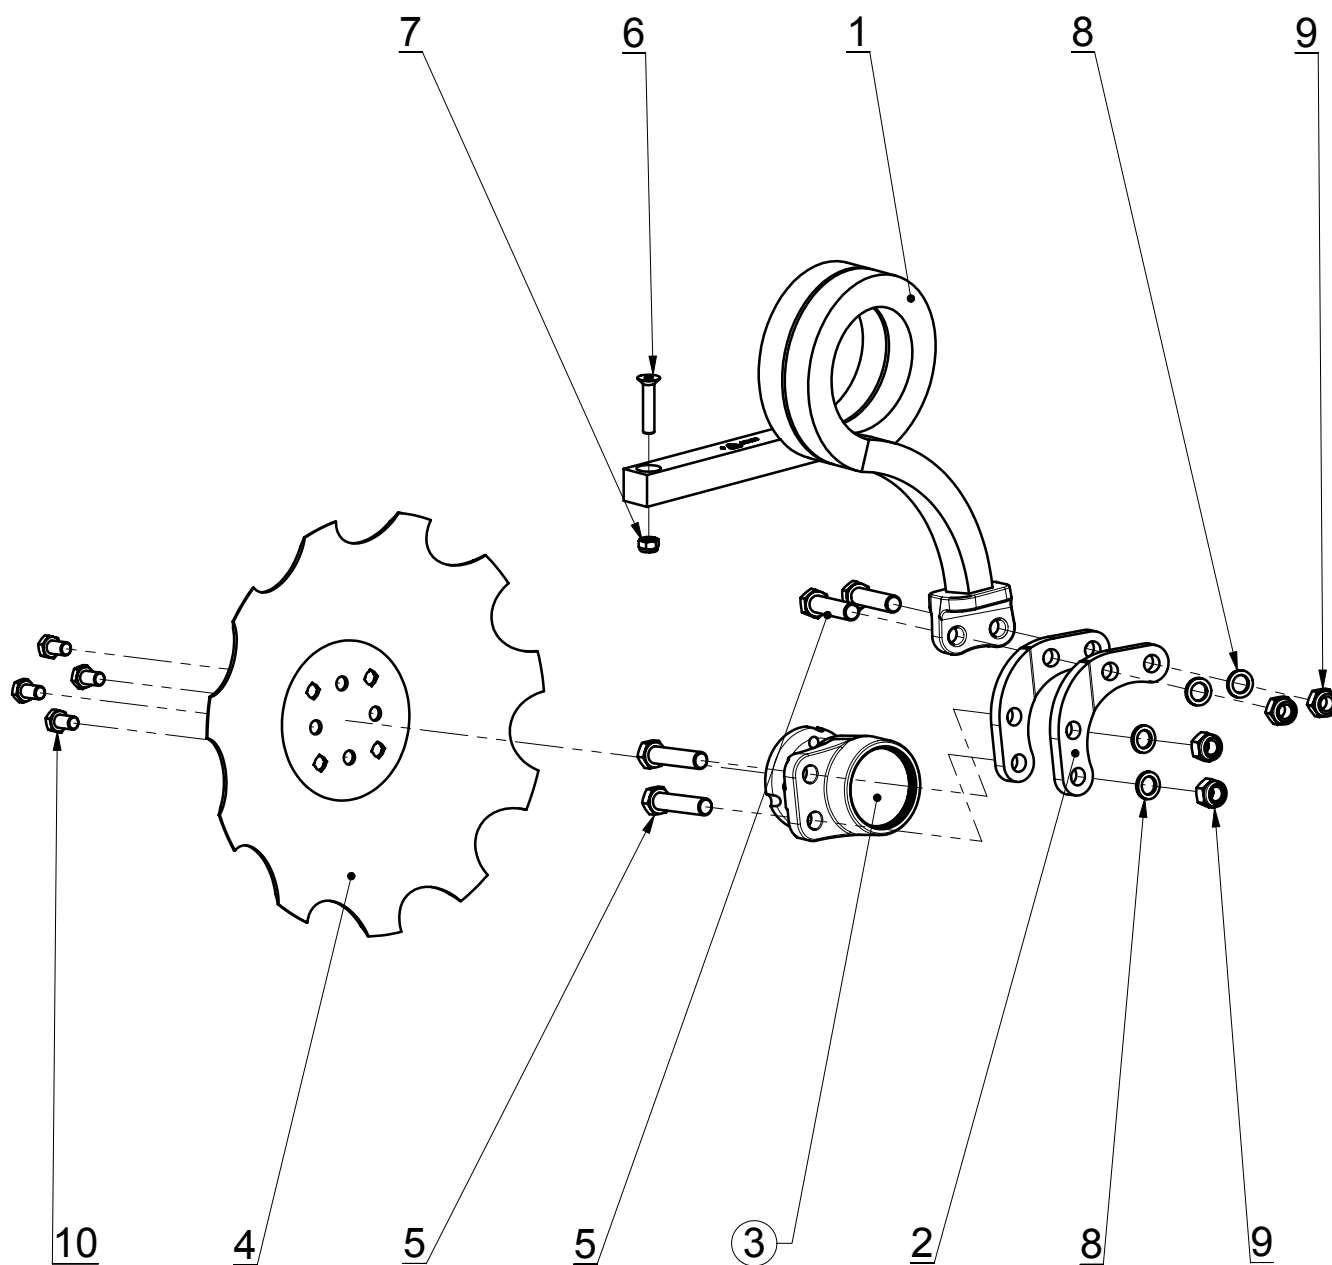


Kit 3D 35 Moyenne C460 Av. + PO

Référence : CD35M-C461-10

					Poids : 30.08 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-03-511	3D S35 Classic rear security	1	16.72	
2	DOM8-12-605	Swivelling leg front hub	2	0.88	
3	ESS556	Moulded cultivation hub	1	5.70	
4	TCS-DIS-508	Crenellated and rounded disc Ø450 with flat base	1	4.46	
5	VH18-080	Screw H - M18 x 80 - 8.8 - bichromated yellow	4	0.216	
6	VFHC12-060	Screw FHC - M12 x 60 - 10.9 - bichromated yellow	1	0.06	
7	EN12	Nylstop Nut M12 - 8 - bichromated yellow	1	0.02	
8	RNL18	Nord-Lock washer Ø18- bichromated yellow	4	0.01	
9	EN18	Nylstop Nut M18 - 8 - bichromated yellow	4	0.06	
10	VH14-025-FT	Screw H - M14 x 25 - 8.8 - bichromated yellow	4	0.059	

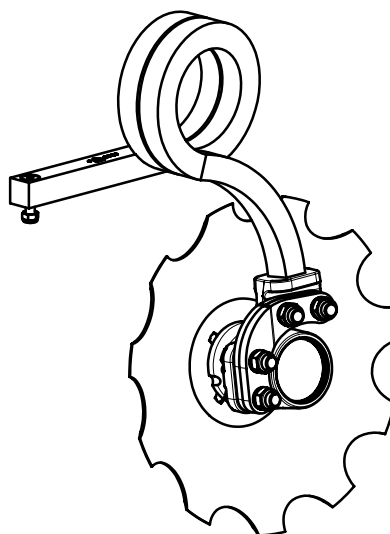


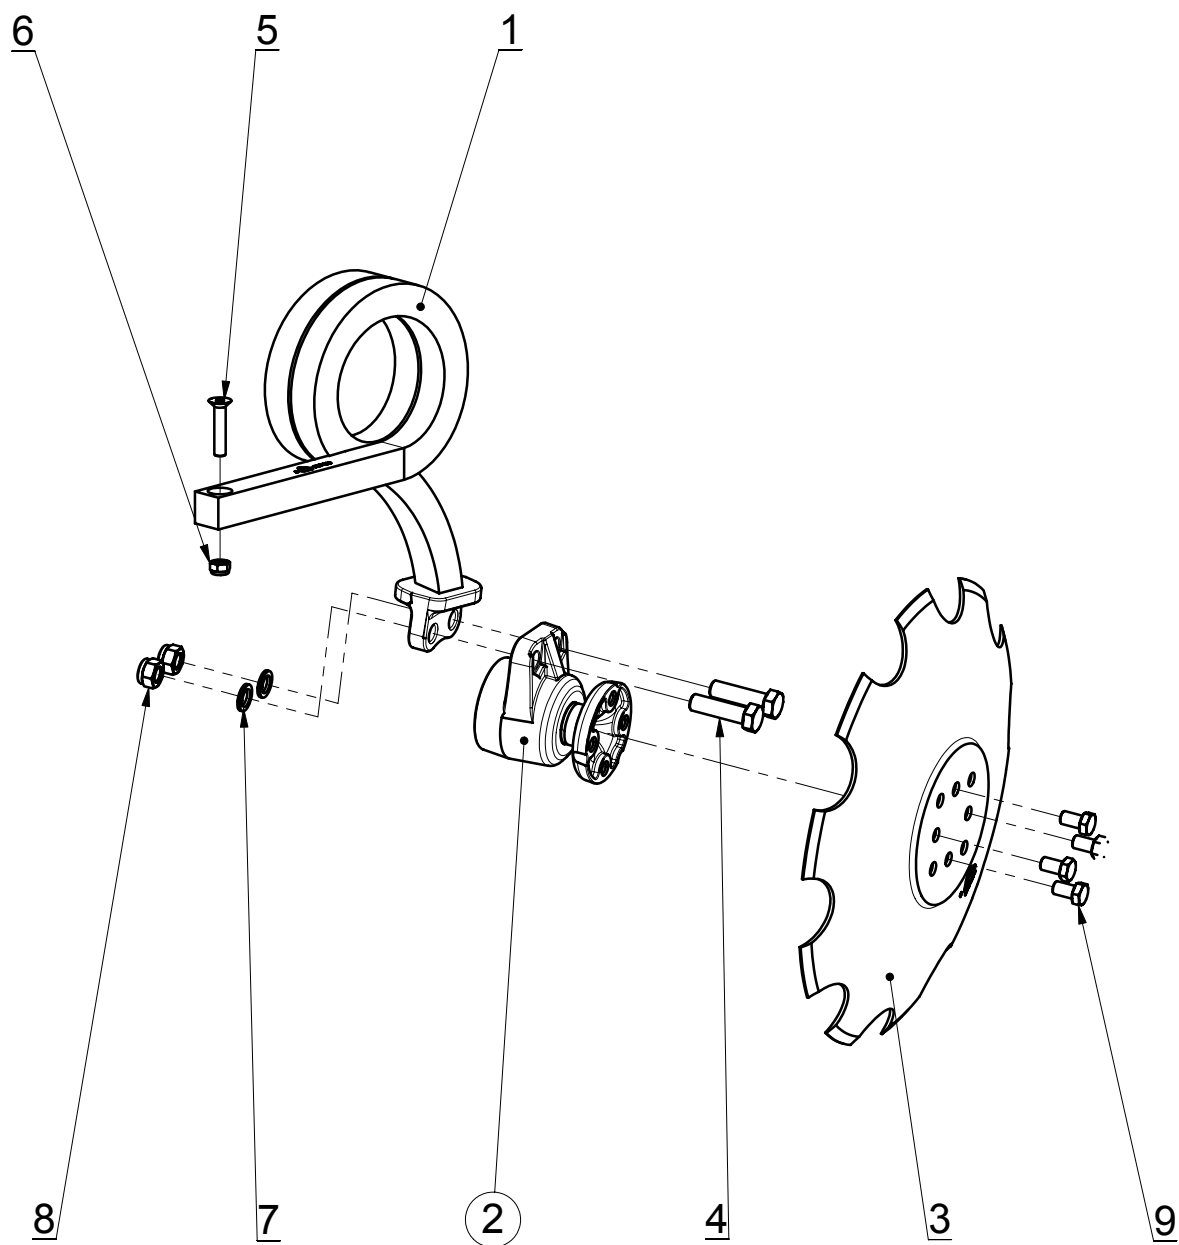


Kit 3D 35 Moyenne C510 Arrière

Référence : CD35M-C512-00

					Poids : 28.91 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-03-512	3D S35 Classic rear security	1	16.72	
2	ESS556	Moulded cultivation hub	1	5.70	
3	TCS-DIS-536	Crenellated disc Ø508 with flat base	1	5.67	
4	VH18-065	Screw H - M18 x 65 - 8.8 - bichromated yellow	2	0.186	
5	VH14-025-FT	Screw H - M14 x 25 - 8.8 - bichromated yellow	4	0.059	
6	VFHC12-060	Screw FHC - M12 x 60 - 10.9 - bichromated yellow	1	0.06	
7	EN12	Nylstop Nut M12 - 8 - bichromated yellow	1	0.02	
8	EN18	Nylstop Nut M18 - 8 - bichromated yellow	2	0.06	
9	RNL18	Nord-Lock washer Ø18- bichromated yellow	2	0.01	

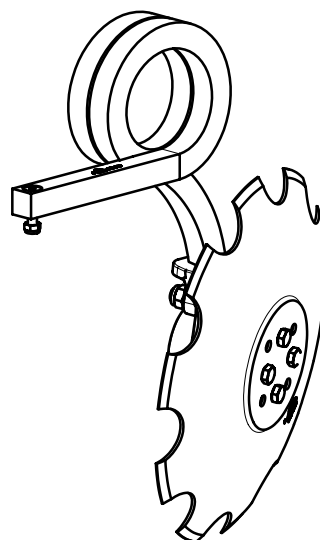


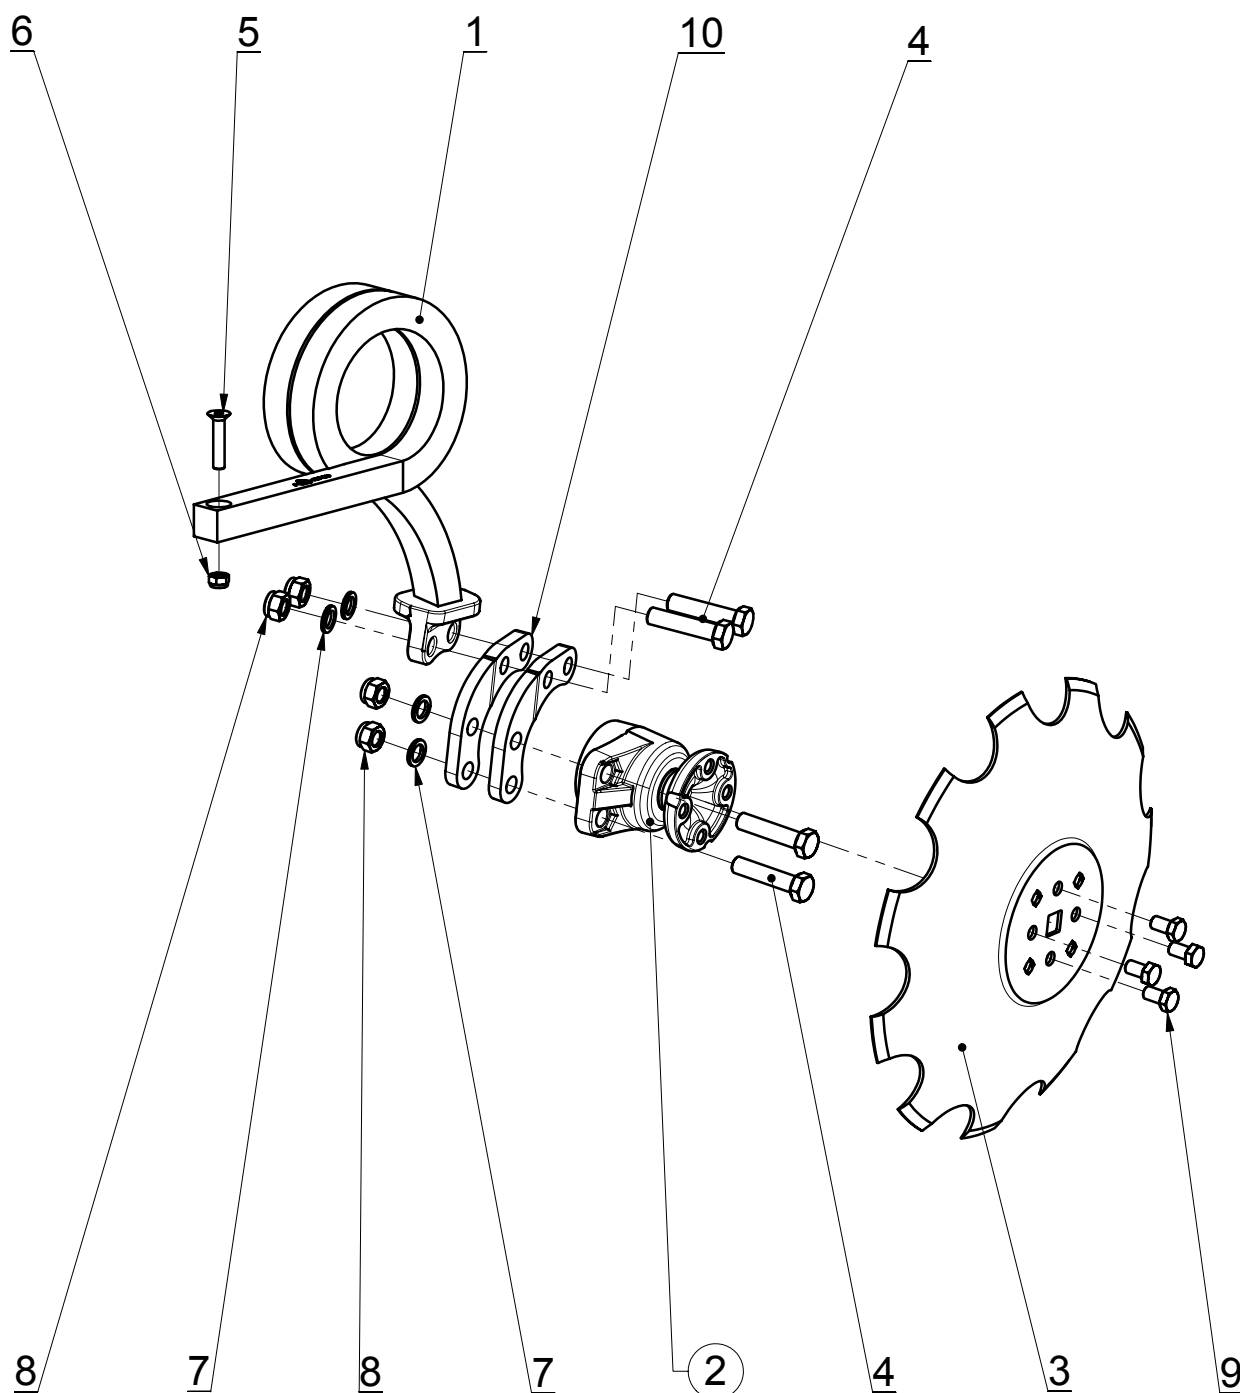


Kit 3D 35 Moyenne C510 Ar. + PO

Référence : CD35M-C512-10

					Poids : 31.29 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-03-512	3D S35 Classic rear security	1	16.72	
2	ESS556	Moulded cultivation hub	1	5.70	
3	TCS-DIS-536	Crenellated disc Ø508 with flat base	1	5.67	
4	VH18-080	Screw H - M18 x 80 - 8.8 - bichromated yellow	4	0.216	
5	VH14-025-FT	Screw H - M14 x 25 - 8.8 - bichromated yellow	4	0.059	
6	VFHC12-060	Screw FHC - M12 x 60 - 10.9 - bichromated yellow	1	0.06	
7	EN12	Nylstop Nut M12 - 8 - bichromated yellow	1	0.02	
8	EN18	Nylstop Nut M18 - 8 - bichromated yellow	4	0.06	
9	RNL18	Nord-Lock washer Ø18- bichromated yellow	4	0.01	
10	DOM8-12-604	Swivelling leg rear hub	2	0.88	

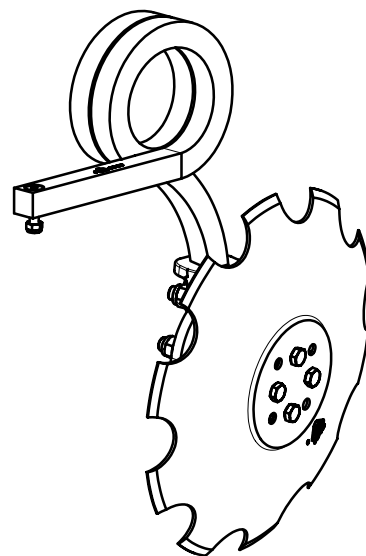


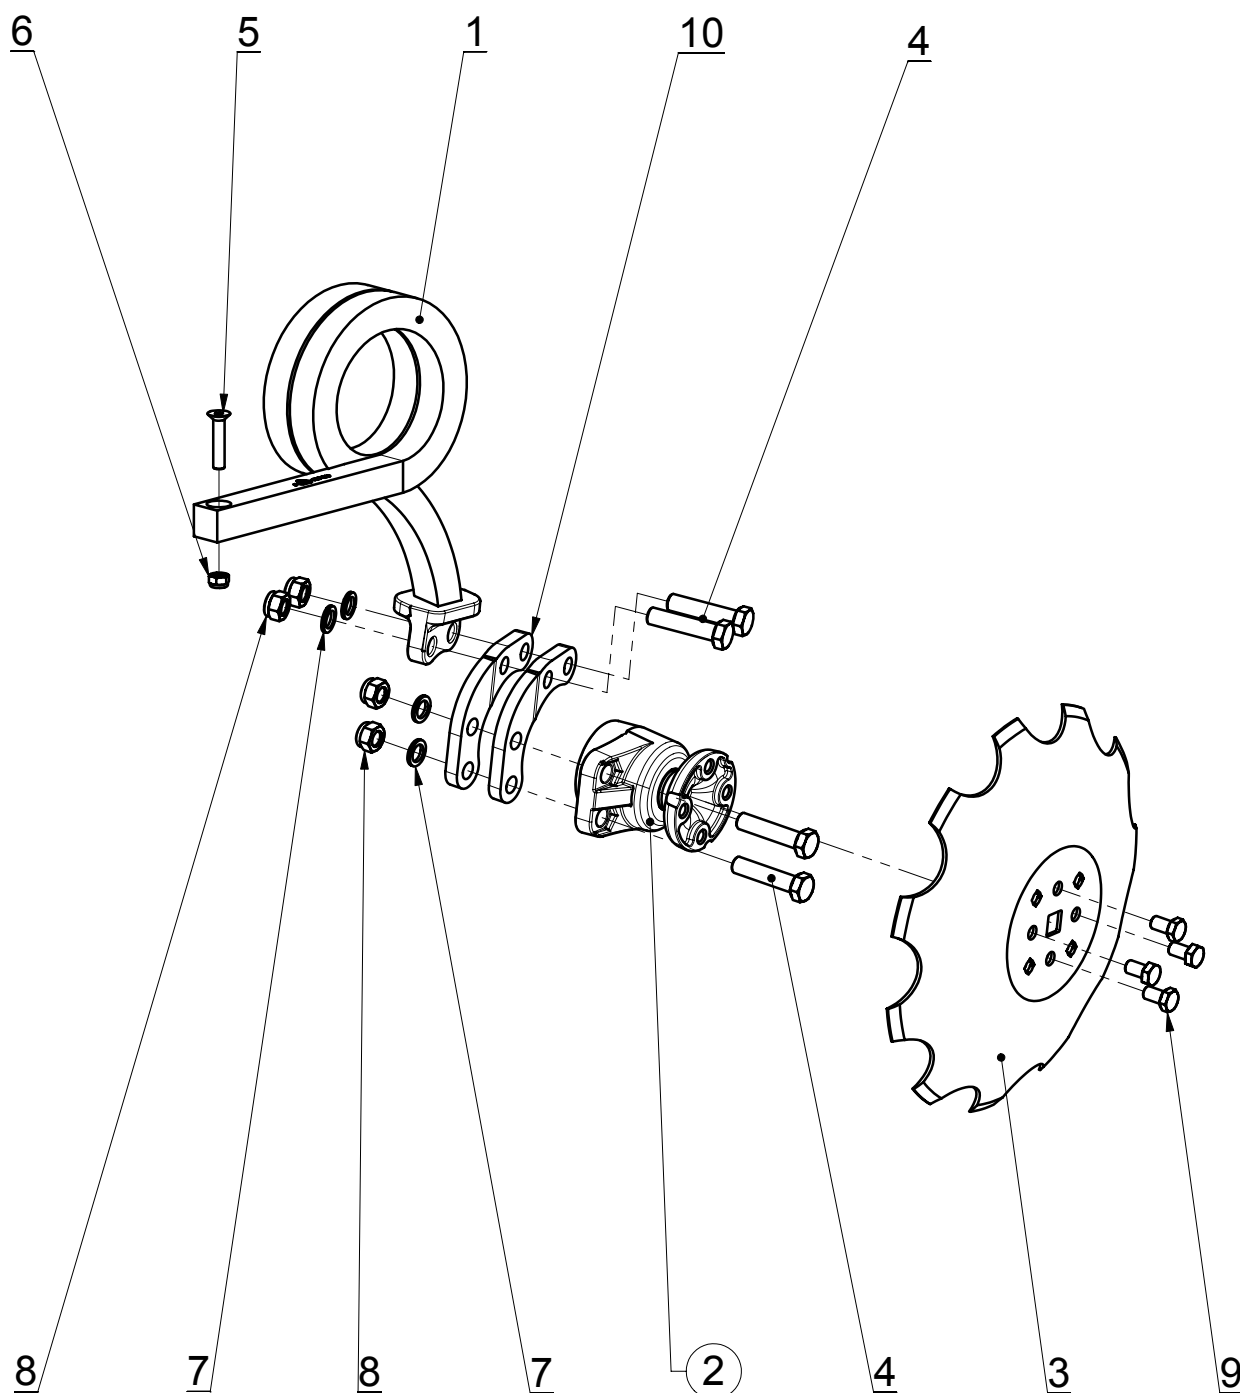


Kit 3D 35 Moyenne C460 Ar. + PO

Référence : CD35M-C462-10

					Poids : 30.08 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-03-512	3D S35 Classic rear security	1	16.72	
2	ESS556	Moulded cultivation hub	1	5.70	
3	TCS-DIS-508	Crenellated and rounded disc Ø450 with flat base	1	4.46	
4	VH18-080	Screw H - M18 x 80 - 8.8 - bichromated yellow	4	0.216	
5	VFHC12-060	Screw FHC - M12 x 60 - 10.9 - bichromated yellow	1	0.06	
6	EN12	Nylstop Nut M12 - 8 - bichromated yellow	1	0.02	
7	RNL18	Nord-Lock washer Ø18- bichromated yellow	4	0.01	
8	EN18	Nylstop Nut M18 - 8 - bichromated yellow	4	0.06	
9	VH14-025-FT	Screw H - M14 x 25 - 8.8 - bichromated yellow	4	0.059	
10	DOM8-12-604	Swivelling leg rear hub	2	0.88	

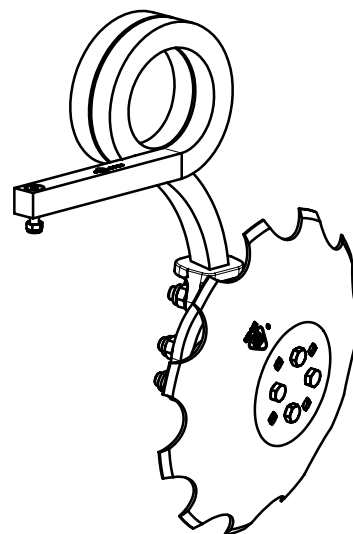


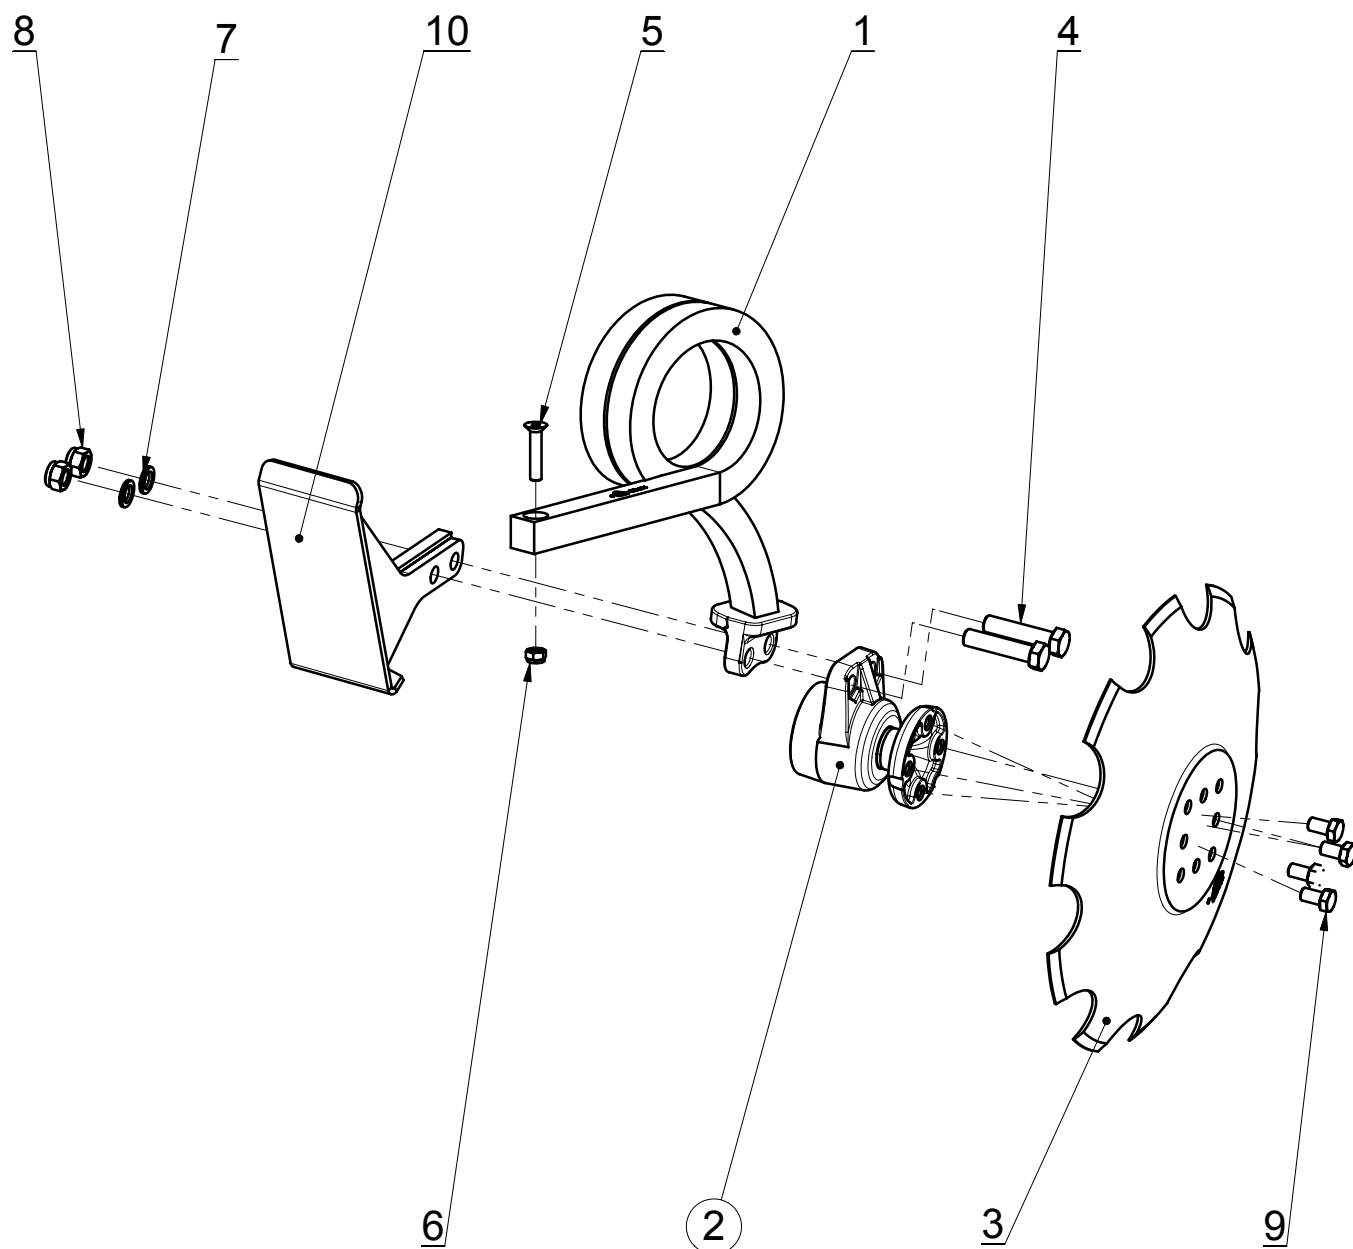


Kit 3D 35 Moyenne C510 Ar. + T2x32

Référence : CD35M-C512-02

					Poids : 33.26 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-03-512	3D S35 Classic rear security	1	16.72	
2	ESS556	Moulded cultivation hub	1	5.70	
3	TCS-DIS-536	Crenellated disc Ø508 with flat base	1	5.67	
4	VH18-080	Screw H - M18 x 80 - 8.8 - bichromated yellow	2	0.216	
5	VH14-025-FT	Screw H - M14 x 25 - 8.8 - bichromated yellow	4	0.059	
6	VFHC12-060	Screw FHC - M12 x 60 - 10.9 - bichromated yellow	1	0.06	
7	EN12	Nylstop Nut M12 - 8 - bichromated yellow	1	0.02	
8	EN18	Nylstop Nut M18 - 8 - bichromated yellow	2	0.06	
9	RNL18	Nord-Lock washer Ø18- bichromated yellow	2	0.01	
10	DOM11-08-505	Individual clod breaking seeding board	1	4.29	

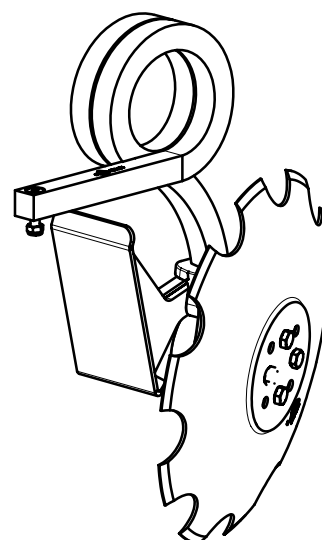


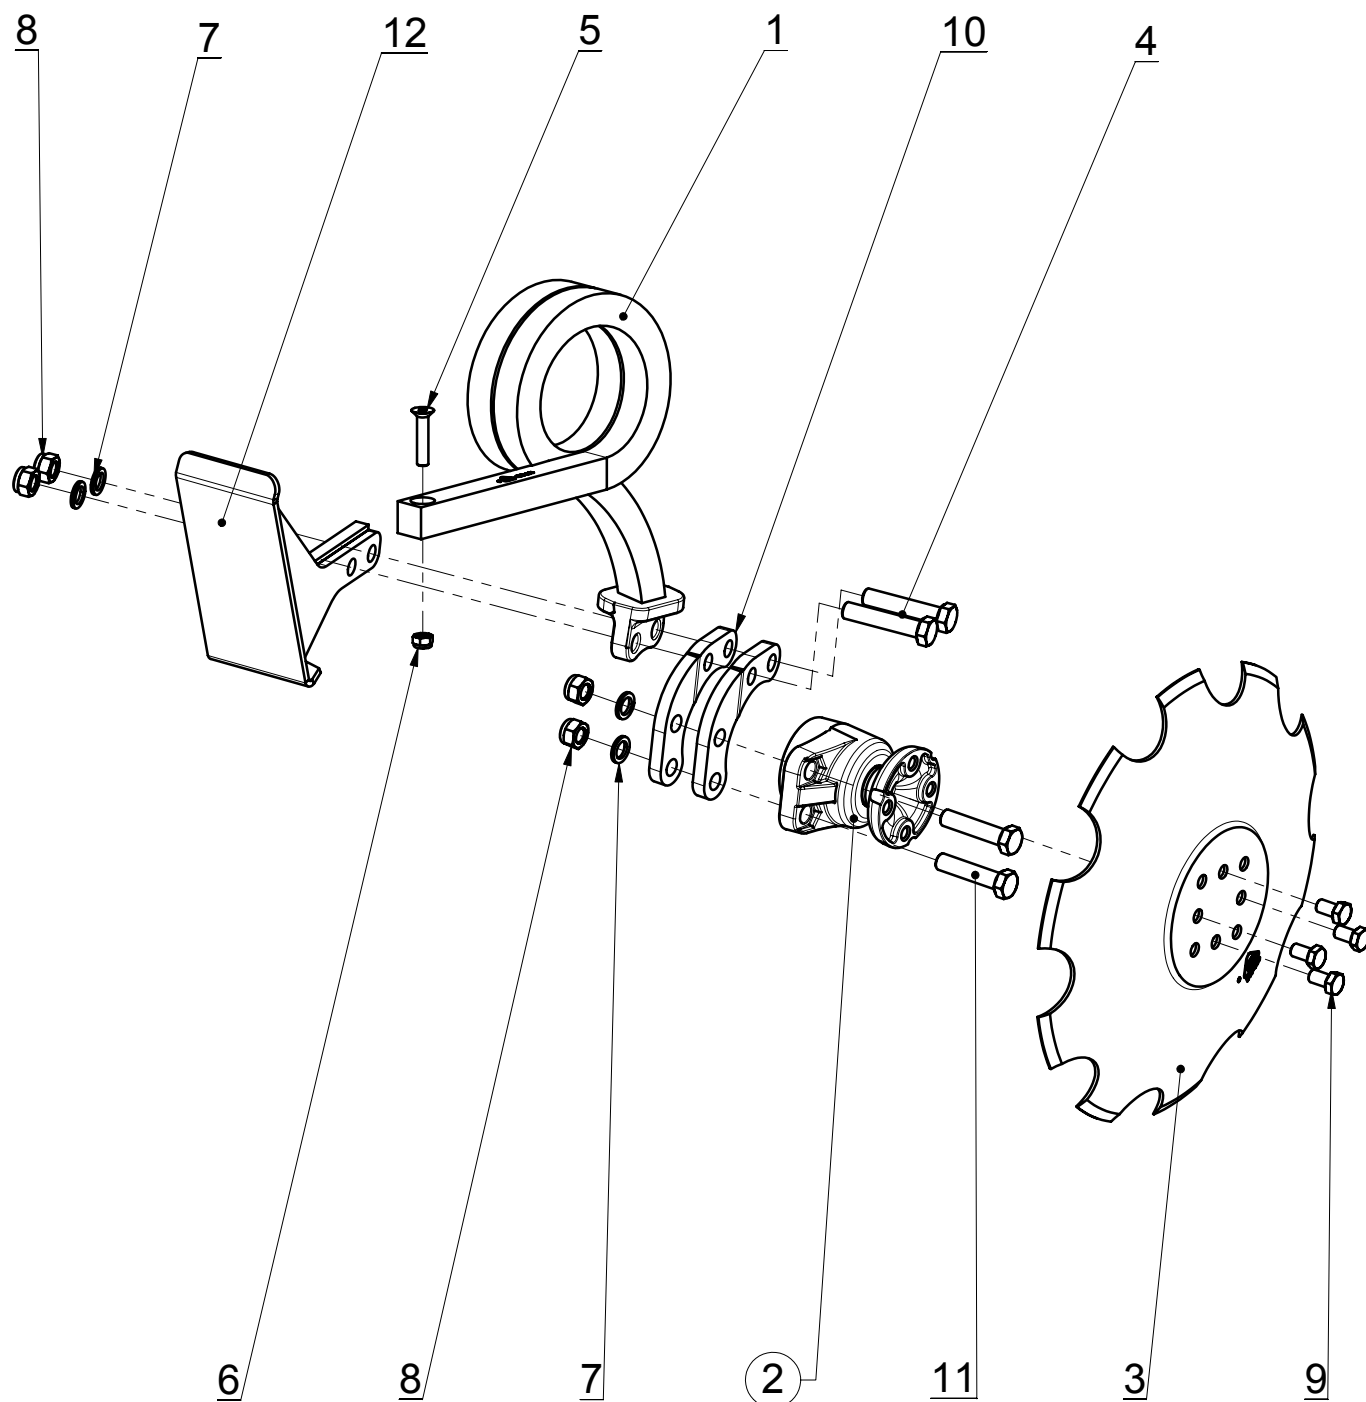


Kit 3D 35 Moy. C510 Ar.+PO+T2x32

Référence : CD35M-C512-12

					Poids : 35.62 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-03-512	3D S35 Classic rear security	1	16.72	
2	ESS556	Moulded cultivation hub	1	5.70	
3	TCS-DIS-536	Crenellated disc Ø508 with flat base	1	5.67	
4	VH18-090	Screw H - M18 x 90 - 8.8 - bichromated yellow	2	0.236	
5	VH14-025-FT	Screw H - M14 x 25 - 8.8 - bichromated yellow	4	0.059	
6	VH18-080	Screw H - M18 x 80 - 8.8 - bichromated yellow	2	0.216	
7	VFHC12-060	Screw FHC - M12 x 60 - 10.9 - bichromated yellow	1	0.06	
8	EN12	Nylstop Nut M12 - 8 - bichromated yellow	1	0.02	
9	EN18	Nylstop Nut M18 - 8 - bichromated yellow	4	0.06	
10	RNL18	Nord-Lock washer Ø18- bichromated yellow	4	0.01	
11	DOM8-12-604	Swivelling leg rear hub	2	0.88	
12	DOM11-08-505	Individual clod breaking seeding board	1	4.29	

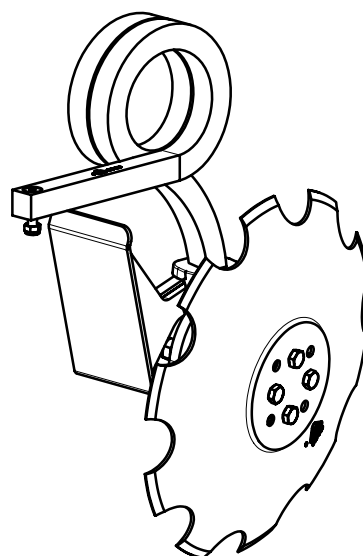


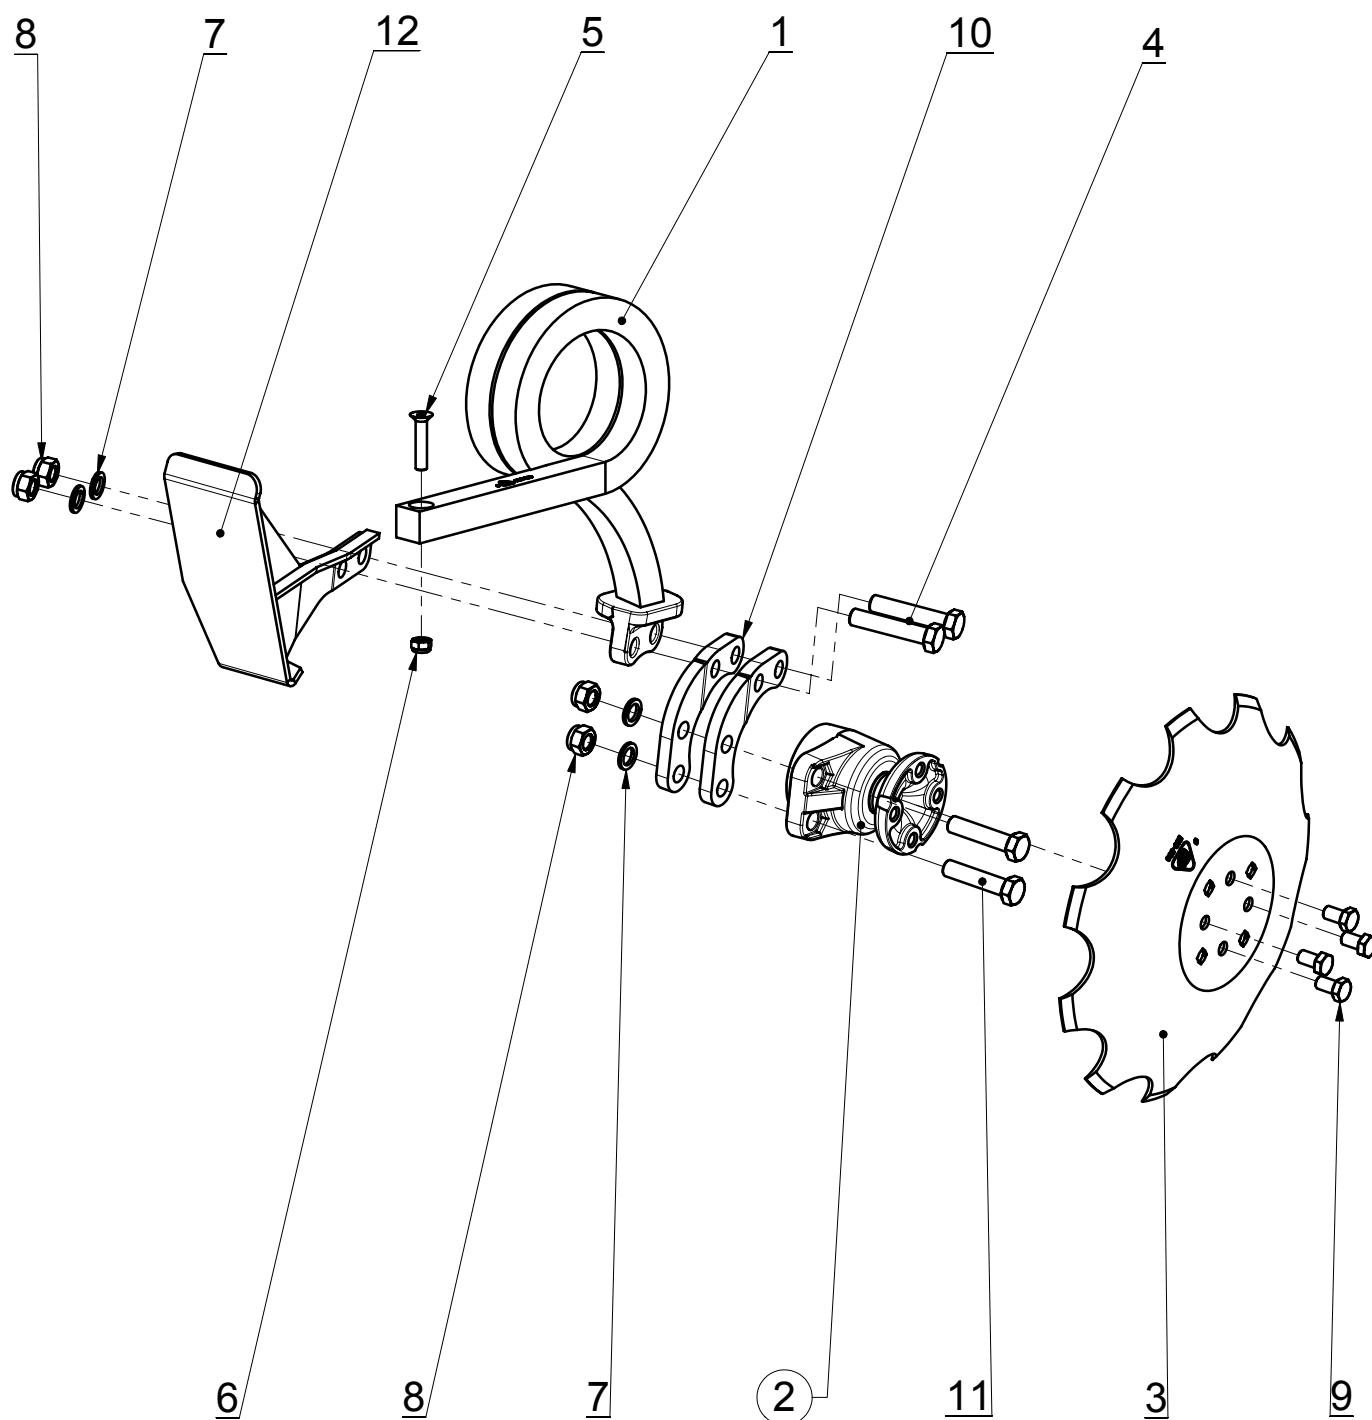


Kit 3D 35 Moy. C460 Ar.+PO+T1x32

Référence : CD35M-C462-11

					Poids : 33.98 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	DOM16-03-512	3D S35 Classic rear security	1	16.72	
2	ESS556	Moulded cultivation hub	1	5.70	
3	TCS-DIS-508	Crenellated and rounded disc Ø450 with flat base	1	4.46	
4	VH18-090	Screw H - M18 x 90 - 8.8 - bichromated yellow	2	0.236	
5	VFHC12-060	Screw FHC - M12 x 60 - 10.9 - bichromated yellow	1	0.06	
6	EN12	Nylstop Nut M12 - 8 - bichromated yellow	1	0.02	
7	RNL18	Nord-Lock washer Ø18- bichromated yellow	4	0.01	
8	EN18	Nylstop Nut M18 - 8 - bichromated yellow	4	0.06	
9	VH14-025-FT	Screw H - M14 x 25 - 8.8 - bichromated yellow	4	0.059	
10	DOM8-12-604	Swivelling leg rear hub	2	0.88	
11	VH18-080	Screw H - M18 x 80 - 8.8 - bichromated yellow	2	0.216	
12	DOM11-08-507	Short individual clod breaking seeding board	1	3.86	

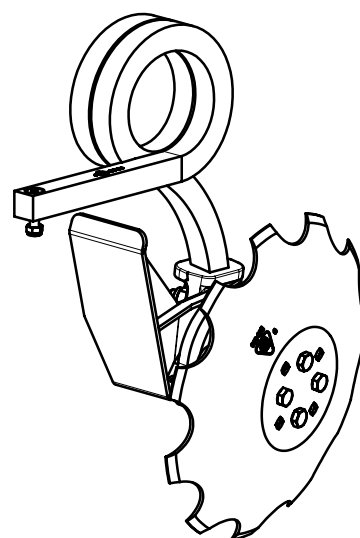


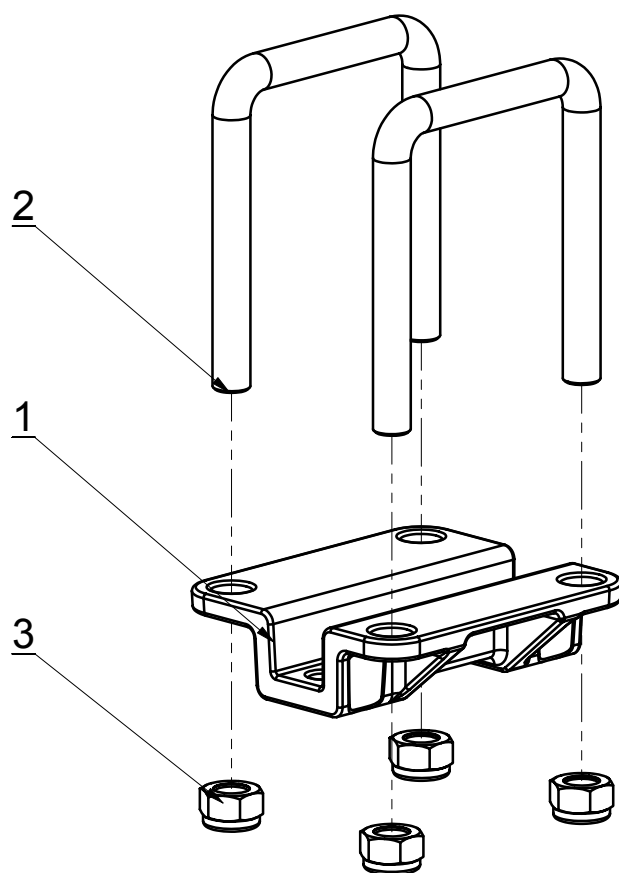


Kit platine standard QDC35

Référence : DOM8-03-053

					Poids : 5.86 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	TCS-PFM-603	Standard fixing plate QDC 35 moulded	1	3.26	
2	ETR-504	Square stirrup Ø20-120	2	1.15	
3	EN20	Nylstop Nut M20 - 8 - bichromated yellow	4	0.08	

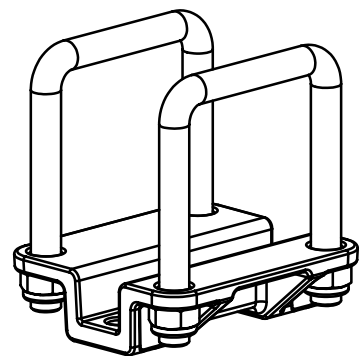


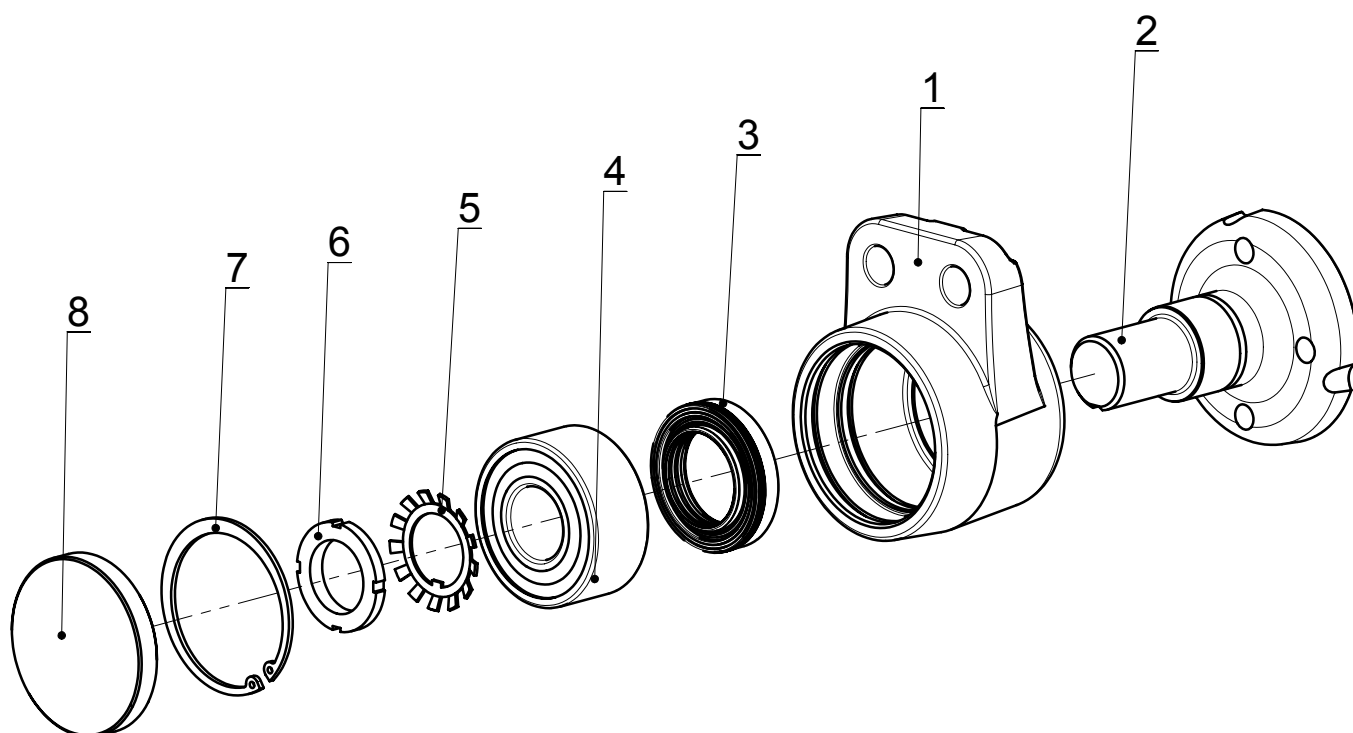


Moyeu culture moulé

Référence : ESS556

					Poids : 5.70 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	ESS556-601	Cultivation hub body	1	2.77	
2	ESS556-603	Cultivation hub swivel	1	1.74	
3	JCA-45X70X17	Sealed washer Ø45x70x17	1	0.20	
4	ROUL-512	Roll-on bearing	1	0.73	
5	MB7	Washer brake Ø 35	1	0.01	
6	KM7	Indented screw M35 x 1.5	1	0.07	
7	CI 80-2,5	interior circlips Ø 80 x 2,5	1	0.03	
8	BE85-12	Sealed plug Ø85 x 12	1	0.15	

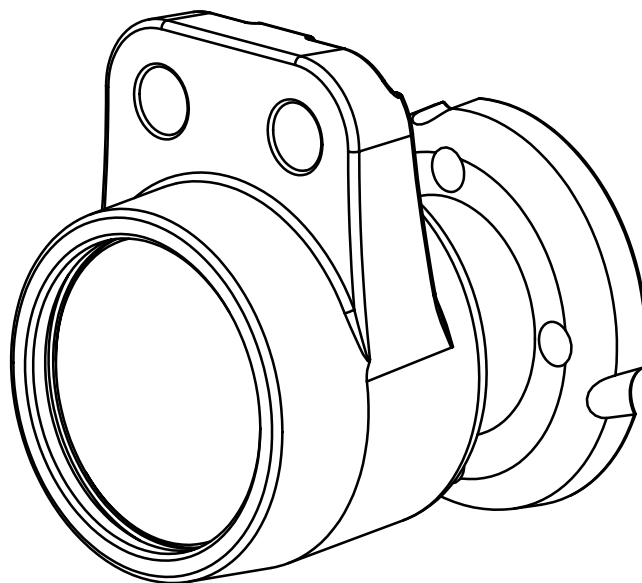


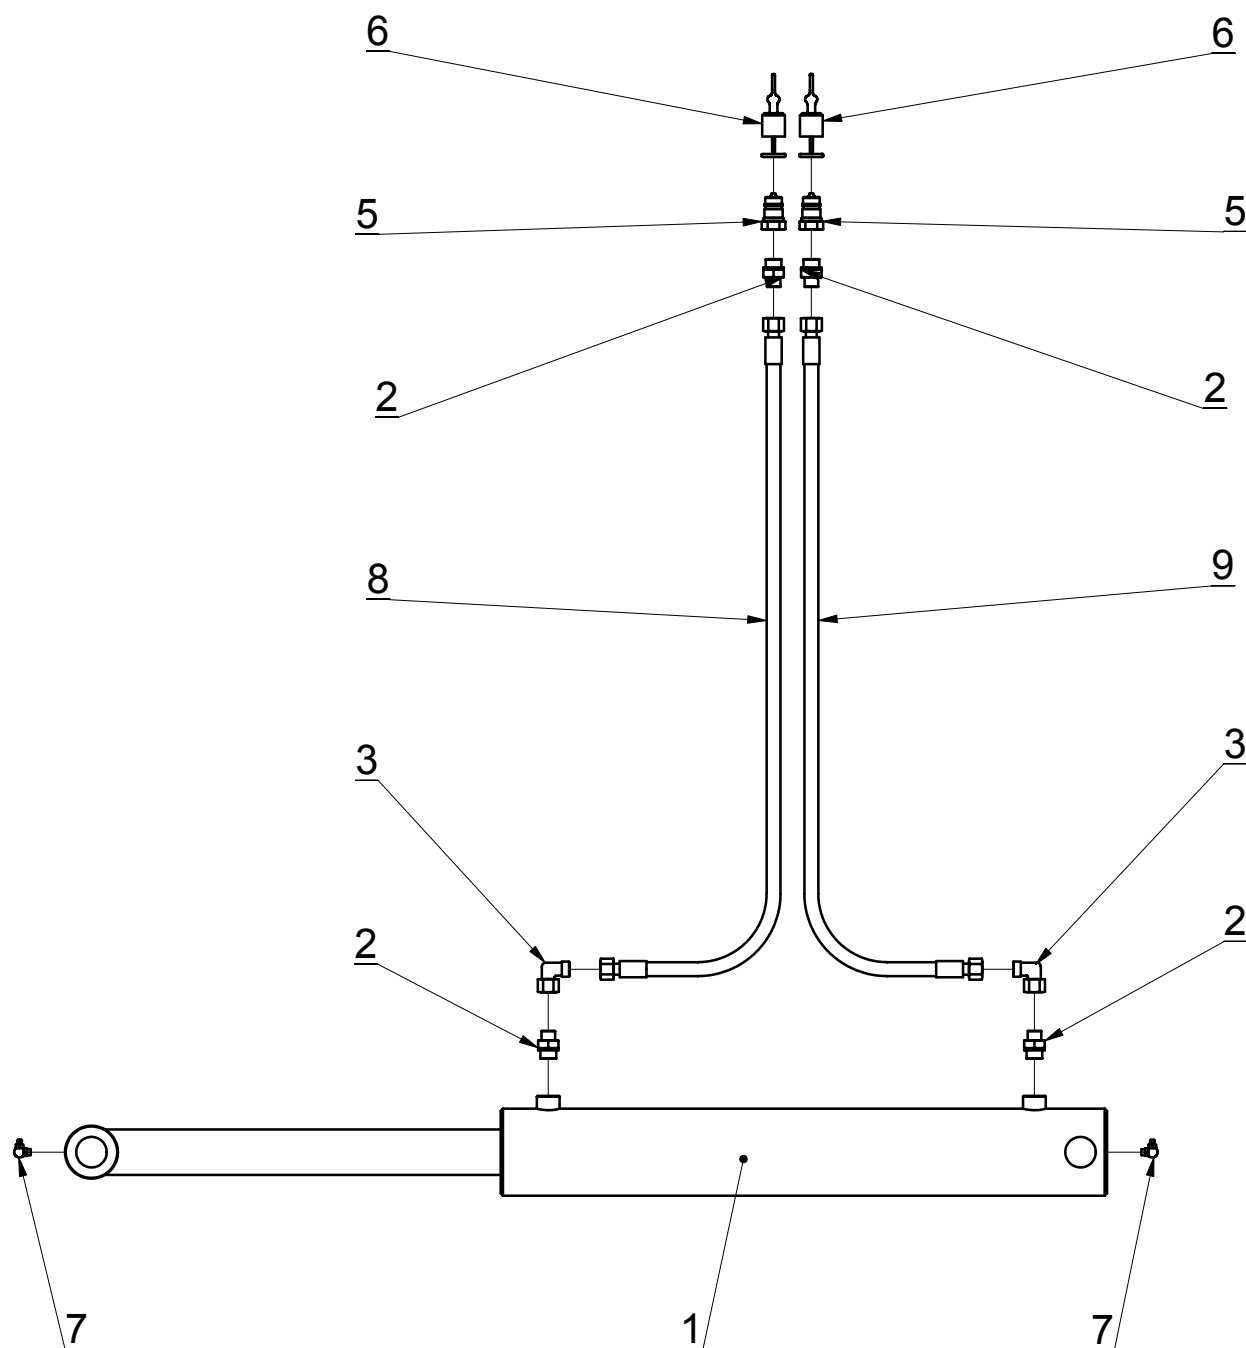


Kit hydraulique

Référence : DOM16-20-001

					Poids : 43.58 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	V601000600	Hydraulic ram doppler effect 1/2" (course 600)	1	42.16	
2	UM12S012R	Male union fitting 1/2" gas - Din 12S	4	0.09	
3	CT12S	Adaptable bend DIN12S	2	0.11	
5	CHMC012	Male valve coupler 1/2" gas	2	0.11	
6	TF1521N	Female plug for male coupler CHMC012 black	2	0.02	
7	GRAI501	M8 x 1.25 lubricator	2	0.02	
8	2D0250ELEL	Flexible coupling 2,50 m Din 12S - Din 12S	1	0.10	
9	2D0250ELEL	Flexible coupling 2,50 m Din 12S - Din 12S	1	0.10	

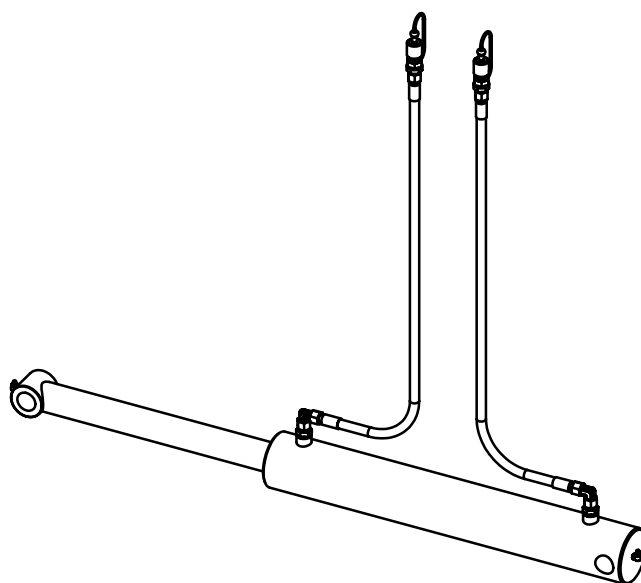


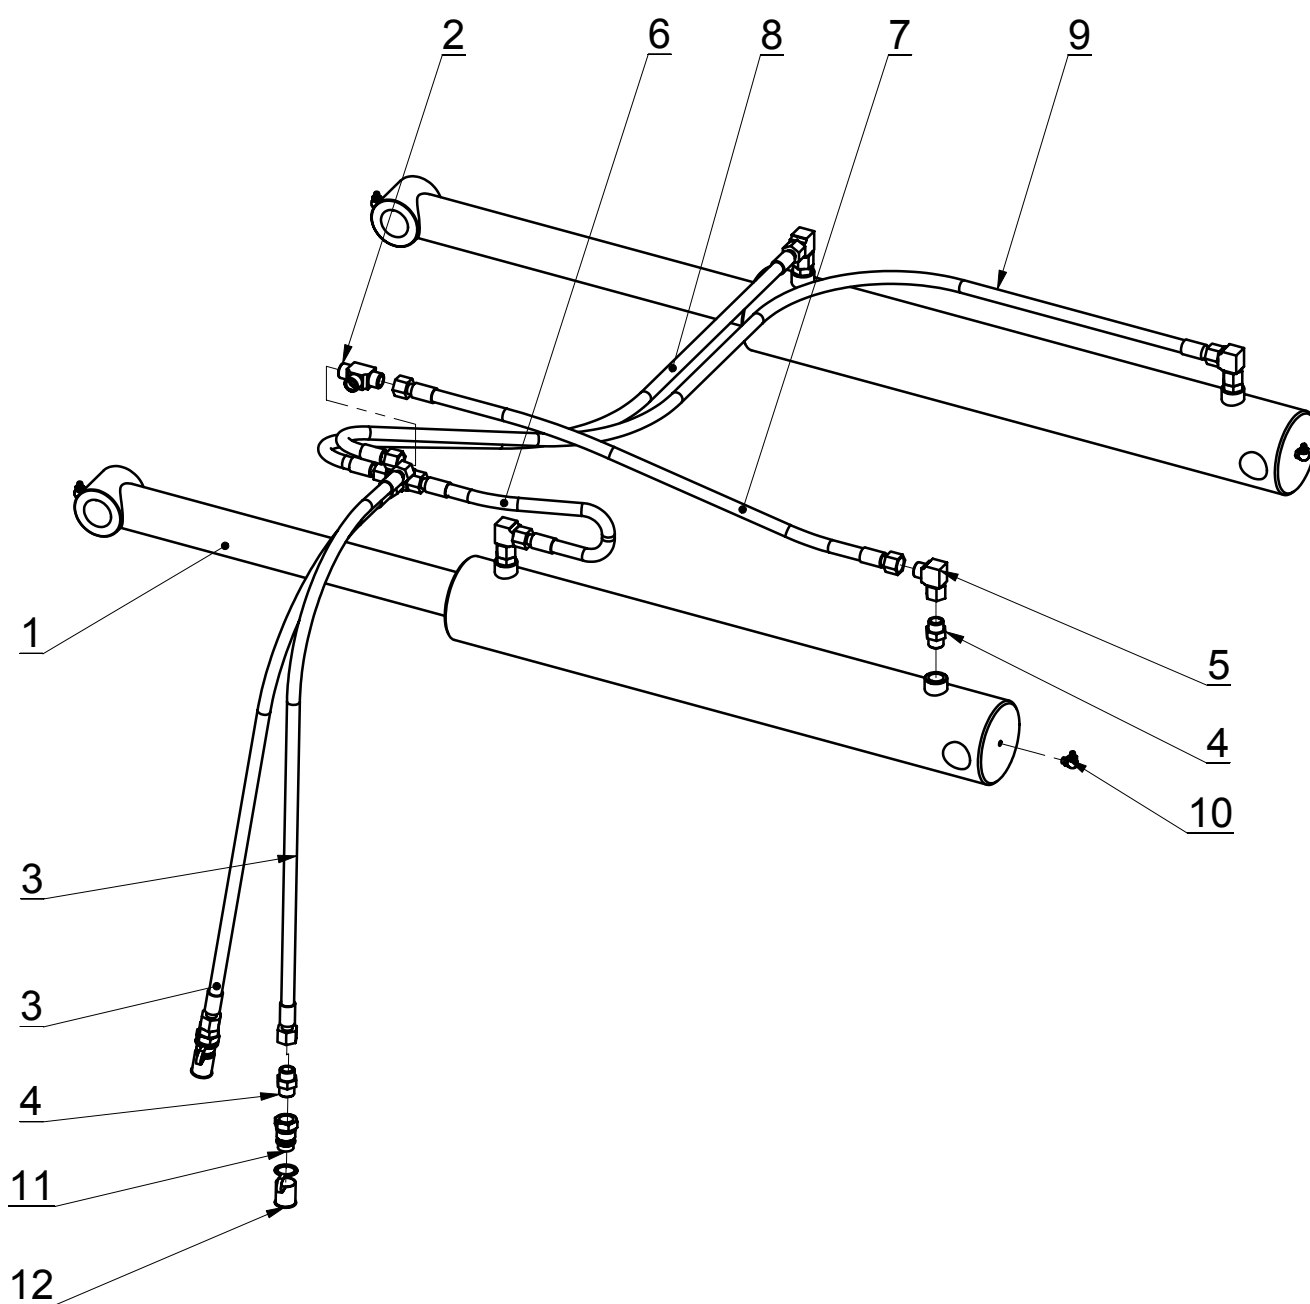


Kit hydraulique


Référence : DOM16-20-002

					Poids : 93.61 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	V601000600	Hydraulic ram doppler effect 1/2" (course 600)	2	42.16	
2	TE12S	T-square DIN12S	2	0.11	
3	2D0150ELEL	Flexible coupling 1.5m DIN 12S- DIN 12S	2	0.33	
4	UM12S012R	Male union fitting 1/2" gas - Din 12S	6	0.09	
5	CT12S	Adaptable bend DIN12S	4	0.11	
6	2D0040ELEL	Flexible coupling 0.4m DIN 12S- DIN 12S	1	0.85	
7	2D0100ELEL	Flexible coupling 1m DIN12S- DIN 12S	1	1.36	
8	2D0150ELEL	Flexible coupling 1.5m DIN 12S- DIN 12S	1	1.95	
9	2D0200ELEL	Flexible coupling 2 m DIN12S-DIN 12S	1	2.88	
10	GRAI501	M8 x 1.25 lubricator	4	0.02	
11	CHMC012	Male valve coupler 1/2" gas	2	0.11	
12	TF1521R	Female plug for male coupler CHMC012 red	2	0.02	

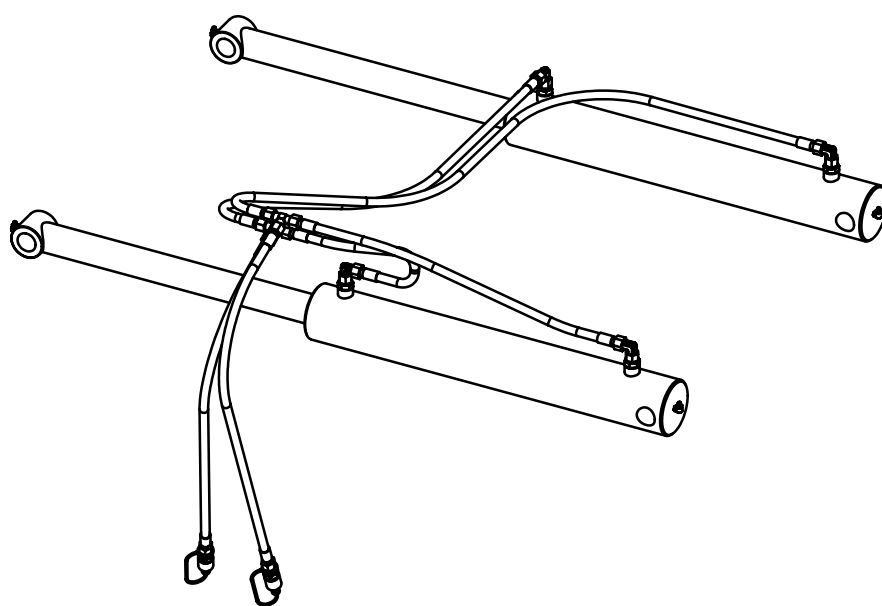

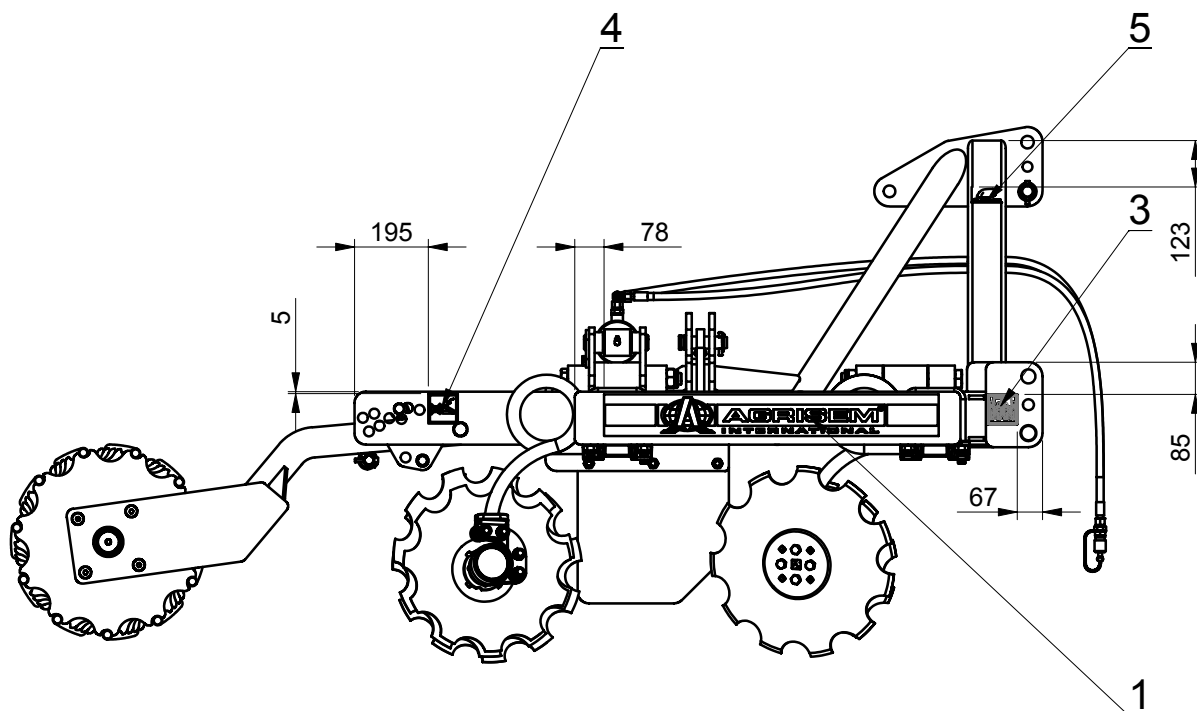

Machine cutting to see the ref. 2

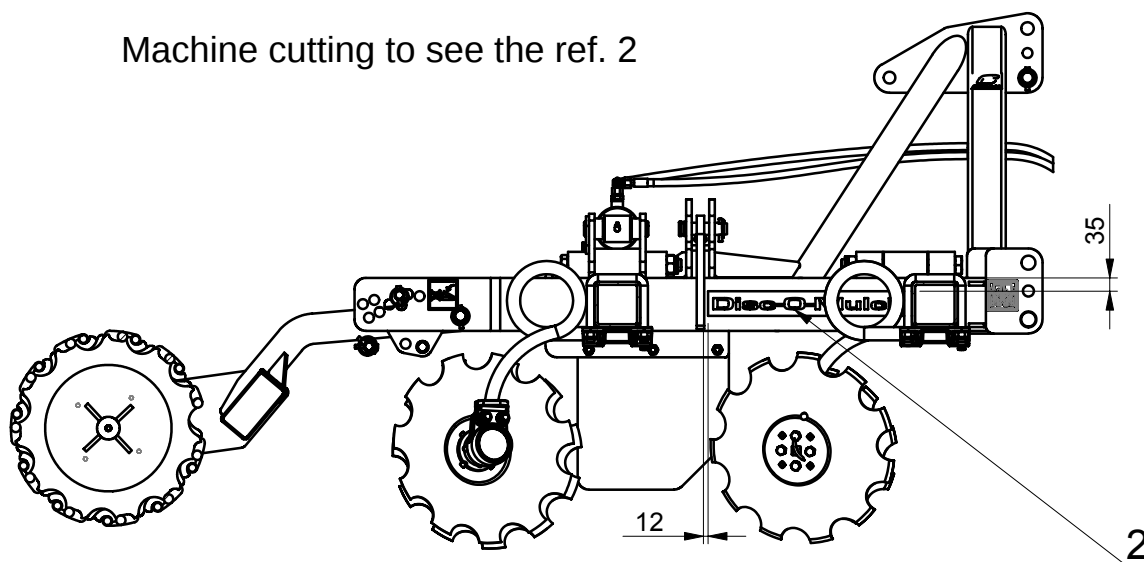

Kit autocollant

Référence : DOM16-ET-002

					Poids : 0.29 Kg
Seep	Reference	Description	Qty.	Weight	Comments
1	ETIQ-648	AGRISEM sticker black edge	2	0.11	
2	ETIQ-626	Disc-O-Mulch sticker for 3D - 540 x 65	2	0.02	
3	ETIQ-504	Coupling sticker - 78 x 78	2	0.00	
4	ETIQ-503	Anti-nipping sticker - 78 x 78	4	0.00	
5	ETIQ-671	Sticker for Classic model	2	0.00	

