

Liquid fertilization





A 250 liter tank is present but no communicating, it is necessary contact softvert for be able to use it

- View of the regulation system
- The working range is between 1 bar and 4.5 because beyond that: the pressure limiter pressure (circled in red) which is factory set will return the product to the tank

Tank emptying control


Filter with valve

Pump oil canister (to be drained every year if the tank is working a lot)

the elements of the tank




Be careful when arriving: the gauge is in the tank

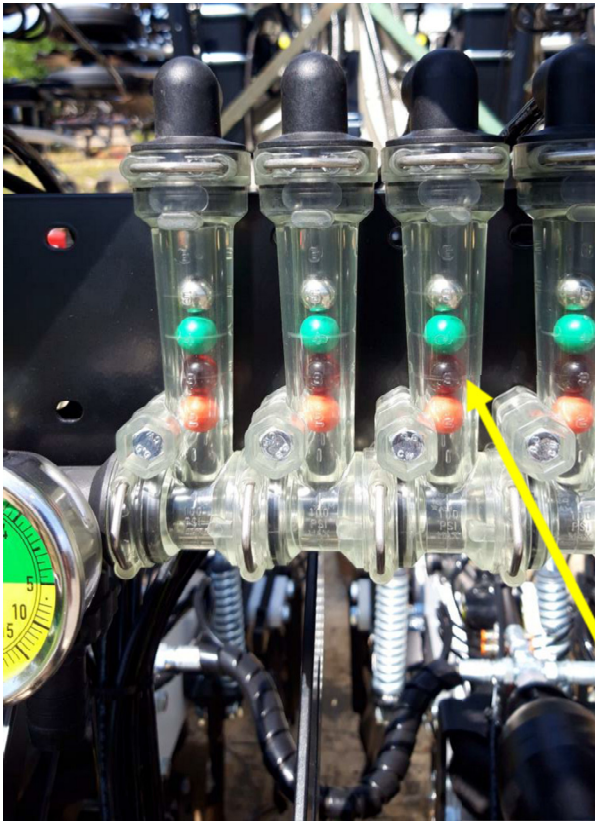

The assembly of this antigout is behind the tooth

but there is also a mounting above the distributors

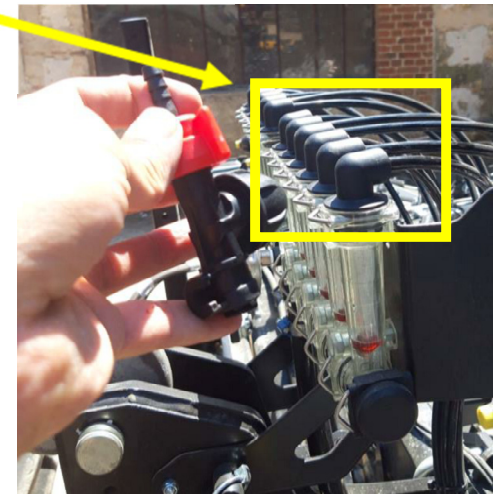

Several balls are delivered with the machine, they have specific weights: we will mainly use the dark red



- In this same photo opposite, in the elbow, we place the calibrated pellet which defines the flow rate of each row. To choose the pastille, use the table: “Wilger_Calcul_Pastilles”



Overdose zone: the green band turns red

Display of dosage in real time, depending on pressure, speed advancement or other factors

Under dosage area: the green band turns yellow

Tank counter possible in descending or ascending order (sum of several fillings also possible with increasing use)



Screen in forced operation

Desired dosage

This button must be pressed to activate forced operation.

calibration

- So to calibrate you have to run a flow test, measure under the teeth the volume collected on all teeth or only 4 teeth (and multiply by 3 to find the total volume of the 12 rows) of my example. Like DSF, there is an index of grams / revolution. He is originally from 75 for fertilizer at 1.3 density.
- To check and refine the setting: recover the product from all rows, activate forced operation and apply the value of 0.1 ha, by multiplying by 10 you can check your dose / ha
- Note that all units are in kg in the tablet: for the user
1kg =1L


**Photo
with
Trash
Wheel**



**Photo
Without
Trash
Wheel**



After a strip cat passage: raise the debris flush of the seeder
(tempo or maxima) Because fine soil is thrown



Additional Info



“Gardena” connection
feeding the rear tool



Here is the pump in its housing, it has no
direction of rotation but like a DSF, it must
not be supplied by a large flow of oil



A light kit is at the price, but
this assembly is not the
original one

Various views